

# TRAKTOR KONTROL D2



Manual



The information in this document is subject to change without notice and does not represent a commitment on the part of Native Instruments GmbH. The software described by this document is subject to a License Agreement and may not be copied to other media. No part of this publication may be copied, reproduced or otherwise transmitted or recorded, for any purpose, without prior written permission by Native Instruments GmbH, hereinafter referred to as Native Instruments.

“Native Instruments”, “NI” and associated logos are (registered) trademarks of Native Instruments GmbH.

Mac, Mac OS, GarageBand, Logic, iTunes and iPod are registered trademarks of Apple Inc., registered in the U.S. and other countries.

Windows, Windows Vista and DirectSound are registered trademarks of Microsoft Corporation in the United States and/or other countries.

All other trade marks are the property of their respective owners and use of them does not imply any affiliation with or endorsement by them.

Document authored by: Native Instruments GmbH

Software version: 2.8 (04/2015)

Special thanks to the Beta Test Team, who were invaluable not just in tracking down bugs, but in making this a better product.

---

**NATIVE INSTRUMENTS GmbH**

Schlesische Str. 29-30  
D-10997 Berlin  
Germany  
[www.native-instruments.de](http://www.native-instruments.de)

**NATIVE INSTRUMENTS North America, Inc.**

6725 Sunset Boulevard  
5th Floor  
Los Angeles, CA 90028  
USA  
[www.native-instruments.com](http://www.native-instruments.com)

**NATIVE INSTRUMENTS K.K.**

YO Building 3F  
Jingumae 6-7-15, Shibuya-ku,  
Tokyo 150-0001  
Japan  
[www.native-instruments.co.jp](http://www.native-instruments.co.jp)

**NATIVE INSTRUMENTS UK Limited**

18 Phipp Street  
London EC2A 4NU  
UK  
[www.native-instruments.com](http://www.native-instruments.com)



© NATIVE INSTRUMENTS GmbH, 2015. All rights reserved.

---

---

# Table of Contents

<b>1</b>	<b>Welcome to the World of TRAKTOR KONTROL D2!</b>	<b>9</b>
1.1	Where to Start	9
1.2	Manual Conventions	11
<b>2</b>	<b>Using Your D2—Getting Started</b>	<b>15</b>
2.1	Using the Browser	16
2.1.1	Opening the Browser	16
2.1.1.1	Scrolling through Music Folders	17
2.1.2	Browsing using Touch Interactions	18
2.1.3	Preview Tracks	18
2.1.4	Sorting Tracks	19
2.2	Loading and Playing a Track	21
2.3	Switching Deck Focus	23
2.4	Switching Deck View and Zooming	26
2.5	Using Cue Points	30
2.5.1	Setting and Deleting Cue Points (HotCues)	31
2.5.2	Aligning Tracks using HotCues	33
2.6	Adjusting Deck-specific tempo	33
2.7	Using Keylock	36
<b>3</b>	<b>Using Your D2—Getting Advanced</b>	<b>41</b>
3.1	Using Touch Strip	41
3.1.1	Using Touch Strip to Seek	41
3.1.2	Using Touch Strip to Nudge/Pitchbend	46
3.1.3	Using the Touch Strip to Scratch and Backspin	49
3.2	Playing with Loops in HOTCUE Mode	54
3.2.1	Engaging and Disengaging a Loop	55
3.2.2	Moving a Loop	57

---

3.2.3	Storing a Loop .....	58
3.3	Playing with Loops in LOOP Mode .....	59
3.3.1	Looping with Pre-defined Sizes .....	60
3.3.2	Beatjumping .....	61
3.4	Using FREEZE Mode .....	62
3.4.1	Engaging Freeze mode on a track .....	64
3.4.2	Adjusting the Freeze Slice Size .....	66
3.4.3	Slicer Mode .....	67
3.5	Using FLUX Mode .....	71
3.6	Remixing with Remix Decks .....	73
3.6.1	Loading a Remix Set .....	73
3.6.2	Triggering Samples .....	75
3.6.3	Triggering Samples using Different Quantize Sizes .....	80
3.6.4	Adjusting Levels and using Filters of Remix Slots .....	82
3.6.5	Using the Touch Strip on a Remix Deck .....	82
3.7	Capturing Samples from Track Decks (Using Remix Mode) .....	83
3.8	Adding FX .....	90
3.8.1	Assigning Decks to the FX Units .....	90
3.8.2	Setting up an FX Unit to Group FX Mode .....	91
3.8.3	Exchanging effects in the Group FX .....	94
3.8.4	Setting up an FX Unit in Single FX Mode .....	96
3.8.5	Storing a Snapshot .....	101
3.8.6	Routing FX .....	102
3.9	Using Performance Modes on Remix Decks .....	102
3.9.1	Selecting and applying a Performance Mode .....	103
3.9.2	Using Performance Mode Pitch .....	104
3.9.3	Using Performance Mode Filter .....	105
3.9.4	Using Performance Mode FX SEND .....	106

---

---

3.10	Working with Beatgrids .....	108
3.10.1	Checking a Beatgrid .....	108
3.10.2	Correcting a Beatgrid Manually .....	110
3.10.3	Additional Help Actions .....	113
<b>4</b>	<b>Hardware Reference .....</b>	<b>117</b>
4.1	Overview of the Controller .....	117
4.2	The Deck .....	119
4.2.1	DECK Button .....	121
4.2.2	FLUX Button .....	121
4.2.3	Mode Select Buttons .....	122
4.2.3.1	HOTCUE Button .....	122
4.2.3.2	LOOP Button .....	123
4.2.3.3	FREEZE Button .....	124
4.2.3.4	REMIX Button .....	126
4.2.4	Loop Encoder .....	126
4.2.5	EDIT Button .....	127
4.2.6	CAPTURE Button .....	128
4.2.7	Display Area and Controls .....	128
4.2.7.1	BACK Button .....	129
4.2.7.2	BROWSE Encoder .....	130
4.2.7.3	Settings Button .....	130
4.2.7.4	Display Buttons .....	132
4.2.7.5	Display .....	133
4.2.7.6	View Button .....	138
4.2.7.7	Performance Mode Button .....	138
4.2.8	Performance Controls .....	138
4.2.9	Slot Volume Faders .....	139
4.2.10	Pads .....	140

---

---

4.2.11	Touch Strip .....	142
4.2.12	Transport Controls .....	143
4.3	The FX Unit .....	145
4.3.1	FX SELECT Button .....	147
4.3.2	FX Unit Assignment .....	147
4.4	The Rear Panel .....	148
4.4.1	Kensington Lock Slot .....	149
4.4.2	USB Connector .....	149
4.4.3	POWER Section .....	150
4.4.4	USB Hub .....	150
<b>5</b>	<b>Preferences Pane in TRAKTOR .....</b>	<b>152</b>
5.1	Restore Default .....	153
5.2	Touch Controls .....	153
5.3	Touchstrip .....	153
5.4	Calibrate .....	154
5.5	LEDs .....	154
5.6	Loop Mode Sizes .....	155
5.7	Enable MIDI Controls .....	155
<b>6</b>	<b>Troubleshooting - Getting Help .....</b>	<b>162</b>
6.1	Troubleshooting .....	162
6.1.1	TRAKTOR Won't Start .....	162
6.1.2	TRAKTOR Crashes .....	162
6.1.3	Updates .....	163
6.2	Getting Help .....	163
6.2.1	Knowledge Base .....	163
6.2.2	Technical Support .....	163
6.2.3	Registration Support .....	164

---

6.2.4	User Forum .....	164
<b>7</b>	<b>Technical Specification .....</b>	<b>165</b>

# 1 Welcome to the World of TRAKTOR KONTROL D2!

Thank you for choosing TRAKTOR KONTROL D2.

## What is TRAKTOR KONTROL D2?

TRAKTOR KONTROL D2 provides a direct tactile interface to TRAKTOR PRO's features and allows you to achieve more with the controller hardware so you have to do less on your computer screen.

D2 enables performance in various live situations, combining the power of computer-based DJing with the immediacy and flow you need to focus on your audience.

## 1.1 Where to Start

TRAKTOR KONTROL D2 installation provides you with many information sources. These are intended to be read in the following sequence to ensure easy access for users of all skill levels:

- TRAKTOR Getting Started
- TRAKTOR Manual
- TRAKTOR KONTROL D2 Manual (this document)

### Your First Stop: Getting Started

This document guides you through configuration of TRAKTOR to work with a hardware controller by means of the Setup Wizard, as well as importing music into your Track Collection. Afterwards, it introduces you to TRAKTOR's basic concepts and workflows and helps you set up your system correctly.

## TRAKTOR Manual

The Manual helps you learn all of the workflows which make TRAKTOR a unique DJing solution. In addition to learning to use TRAKTOR's core features, this document gives advice on working in various configurations; from using TRAKTOR in the most basic setup on its own to integrating turntables, external DJ mixers and audio interfaces, as well as the SCRATCH extension.



Access the TRAKTOR manual via TRAKTOR's Help menu. The '*Open Manual...*' entry will open the Documentation sub-folder inside TRAKTOR's application folder.

## TRAKTOR KONTROL D2 Manual

The D2 Manual picks up where controlling TRAKTOR features from the D2 are concerned. A detailed tutorial section guides you through accessing the basics like loading tracks, mixing, setting cue points, looping and using Remix Decks from D2.

Next, a comprehensive Hardware Reference details each and every component you will encounter on the TRAKTOR KONTROL D2 controller. The later chapters of this manual provide additional information on solving common issues, and the device's full technical specification.

## CONTROLLER EDITOR Manual

Besides using D2 with the dedicated TRAKTOR software, you can also use it as a powerful and highly versatile MIDI controller with any other MIDI-capable application or device. This is made possible by the CONTROLLER EDITOR software, an application which allows you to assign MIDI controller messages to D2's pads, knobs, faders and encoders. The CONTROLLER EDITOR is usually automatically installed during TRAKTOR's installation. For more information on this, please refer to the CONTROLLER EDITOR Manual available as a PDF file in the Documentation subfolder of the CONTROLLER EDITOR installation folder on your hard disk.

## Other Online Resources

If you are experiencing problems related to your Native Instruments product that the supplied documentation does not cover, there are several ways of getting help:

- Knowledge Base
- User Forum
- Technical Support

- Registration Support

You will find more information on these in chapters [↑6.1, Troubleshooting](#) and [↑6.2, Getting Help](#).

## 1.2 Manual Conventions

This section introduces you to the signage and text highlighting used in this manual. This manual uses particular formatting to point out special facts and to warn you of potential issues. The icons introducing these notes let you see what kind of information is to be expected:



Whenever this exclamation mark icon appears, you should read the corresponding note carefully and follow the instructions and hints given there if applicable.



This light bulb icon indicates that a note contains useful extra information. This information may often help you solve a task more efficiently, but does not necessarily apply to the setup or operating system you are using; however, it's always worth a look.

Furthermore, the following formatting is used:

- Text appearing in (drop-down) menus (such as *Open...*, *Save as...* etc.) and paths to locations on your hard drive or other storage devices is printed in *italics*.
  - Text appearing elsewhere (labels of buttons, controls, text next to checkboxes etc.) is printed in **blue**. Whenever you see this formatting applied, you will find the same text appearing somewhere on the screen.
  - Text appearing on the display of the D2 controller is printed in **light grey**. Whenever you see this formatting applied, you will find the same text on a controller display.
  - Text appearing on labels of the hardware controller is printed in **orange**. Whenever you see this formatting applied, you will find the same text on the controller.
  - Important names and concepts are printed in **bold**.
  - References to keys on your computer's keyboard you'll find put in square brackets (e.g., "Press [Shift] + [Enter]").
- ▶ Single instructions are indicated by this play button type arrow.

→ Results of actions are indicated by this smaller arrow.

## Naming Conventions

Throughout the documentation, we will refer to the TRAKTOR KONTROL D2 hardware controller either as the controller or simply D2.

The TRAKTOR 2 software and TRAKTOR SCRATCH will be referred to as **TRAKTOR**.

## Button Combinations and Shortcuts on Your Controller

Most instructions will use the “+” sign to indicate buttons (or buttons and pads) that must be pressed **simultaneously**, starting with the button indicated first. E.g., an instruction such as:

“Press **SHIFT** + **PLAY**”

means:

1. Press and hold **SHIFT**.
2. While holding **SHIFT**, press **PLAY** and release it.
3. Release **SHIFT**.

## FX Knobs and Buttons

Above each of the Displays, there's a row of FX knobs and FX buttons which aren't labeled. Similarly, the knobs below the display are unlabeled, the buttons are all labeled **ON**. To differentiate them, we'll refer to them as **FX knobs 1-4** and **FX buttons 1-4** for the elements above the display and **Performance knobs 1-4** and **Performance buttons 1-4** beneath the display.



Numbering scheme for FX and Performance controls

## Display Buttons


On each side of a display, there are two buttons marked by a square icon. To differentiate them from each other, we'll refer to them as depicted here:



Numbering scheme for Display Buttons

## Pads

Each Deck comes with eight multi color pads. Where necessary, we'll refer to them in this order:

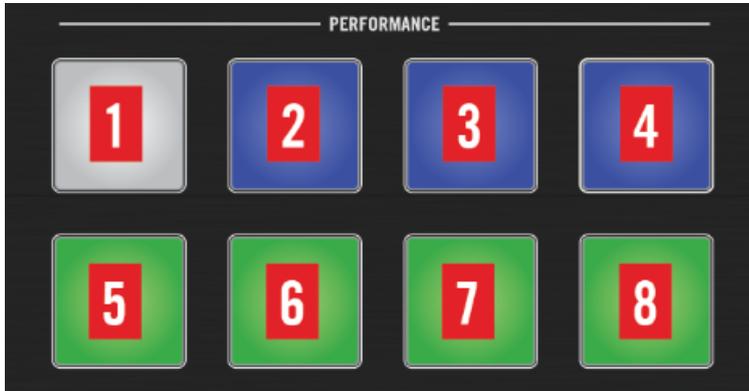

Numbering of the Pads in the PERFORMANCE section

---

## 2 Using Your D2—Getting Started

This section will guide you through the most common tasks you will encounter during your work with TRAKTOR KONTROL D2. Most of the tutorials included are workflow-oriented. They start with the simplest tasks and progressively lead you to more complex operation, helping you to become familiar with TRAKTOR KONTROL D2.

The tutorials presented here make use of the included demo tracks, which were automatically copied to your hard disk during the TRAKTOR KONTROL D2 installation procedure. Therefore, you can follow these tutorials even if you haven't imported your own music.

The tutorials here focus on using the device as the integrated controller for the TRAKTOR software on your computer. By the end of this chapter you will be equipped with the fundamental knowledge to enjoy using your TRAKTOR KONTROL D2, and begin to uncover the creative opportunities it presents to your DJ sessions.

### General Prerequisites

We assume here that your TRAKTOR KONTROL D2 system is already up and running. If that's not the case, please follow the instructions in the separate Setup Guide and return to this chapter when you are ready.

In case you already changed some settings in TRAKTOR KONTROL D2 before you start with these tutorials, we strongly recommend you to reset your TRAKTOR KONTROL D2 system to the factory settings by doing the following:

1. In the TRAKTOR software, click the [Help](#) menu in the menu bar at the top of your screen (on Mac OS X) or at the top of the window (on Windows), and select *Help > Start Setup Wizard*.
2. In the window that opens, click [Next](#) to skip the setup screens.
3. On the [YOUR TRAKTOR SETUP](#) screen, click [Finish](#) at the bottom right corner without selecting anything else.

⇒ Your TRAKTOR KONTROL D2 is now reset to the factory settings.

The tutorials presented here assume that TRAKTOR KONTROL D2 is in its default factory state. If it's not the case, we cannot guarantee that you will experience what is described here, and as a result you might find it difficult to follow the instructions.


## 2.1 Using the Browser

This tutorial explains how to use the Browser to access your music library. You will learn how to sort and preview your tracks in the Browser, and how to load tracks into Decks.


### 2.1.1 Opening the Browser

To open the Browser:

- ▶ Push the **BROWSE** encoder.




The Browser will be displayed in the display.

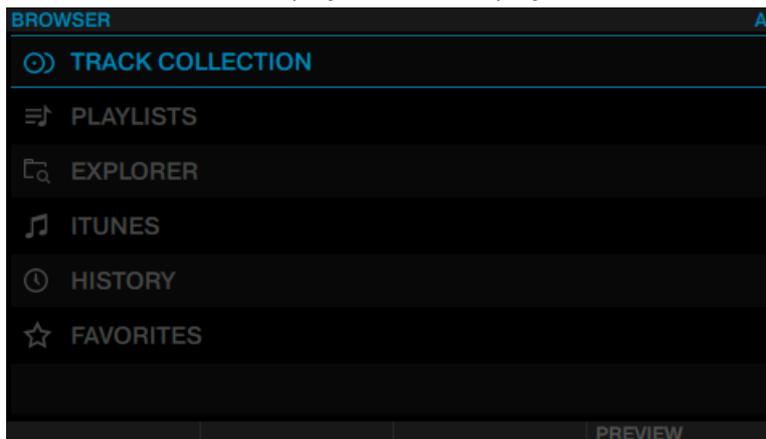

### 2.1.1.1 Scrolling through Music Folders

To scroll through music folders:

- ▶ Rotate the **BROWSE** encoder. The selected entry will be highlighted in blue. The Browser View shows your current location in the folder structure at the top of the display, e.g. BROWSER>PLAYLIST>DEMO TRACKS.

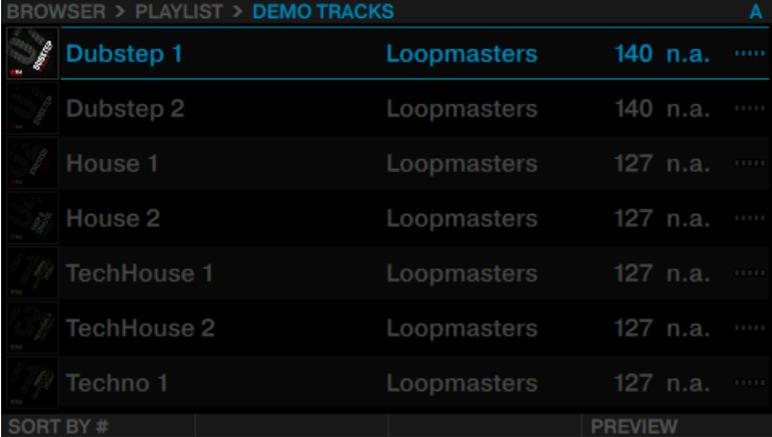

The screenshot shows the browser interface with the path BROWSER > PLAYLIST > DEMO TRACKS. The list contains the following items:

Track Name	Artist	Duration	Genre	Options
Dubstep 1	Loopmasters	140	n.a.	.....
Dubstep 2	Loopmasters	140	n.a.	.....
House 1	Loopmasters	127	n.a.	.....
House 2	Loopmasters	127	n.a.	.....
TechHouse 1	Loopmasters	127	n.a.	.....
TechHouse 2	Loopmasters	127	n.a.	.....
Techno 1	Loopmasters	127	n.a.	.....

At the bottom, there are controls for 'SORT BY #' and 'PREVIEW'.

To open folders and load tracks:

- ▶ Press the **BROWSE** encoder to open a folder.
- ▶ Press the **BROWSE** encoder to load a track.

To return to the previous folder:

- ▶ Press the **BACK** button.



To exit the Browser:

- ▶ Press the VIEW button. The display will return to Track view.



## 2.1.2 Browsing using Touch Interactions

In addition to regular interactions with D2, you can perform touch interactions. However, to use touch interactions when browsing, the touch sensitivity for the **BROWSE** encoder has to be enabled:

1. Open the TRAKTOR Preferences.
2. Select the tab **TRAKTOR KONTROL D2**.
3. Enable the Touch Control **Auto Open Browser on Touch**.

→ The touch sensitivity is now enabled on the **BROWSE** encoder.

With touch sensitivity enabled the following touch interactions can be performed:

To open the Browser:

- ▶ Touch the **BROWSE** encoder. The Browser will be displayed in the respective display.

To exit the Browser:

- ▶ Release the **BROWSE** encoder or stop interacting in the Browser. The display will return to Track view.

## 2.1.3 Preview Tracks


In the Browser of the TRAKTOR KONTROL D2 it is possible to preview tracks directly. The preview will be audible in TRAKTOR's Output Review channel routing to an output channel on your audio interface that is connected to your mixer.




For more information on how to route audio channels with TRAKTOR, refer to chapter 14.3 Output Routing in the TRAKTOR Manual.

To preview a selected track:

1. Press the **ON** button 4 to start preview. The preview is now audible in the Output Preview channel.

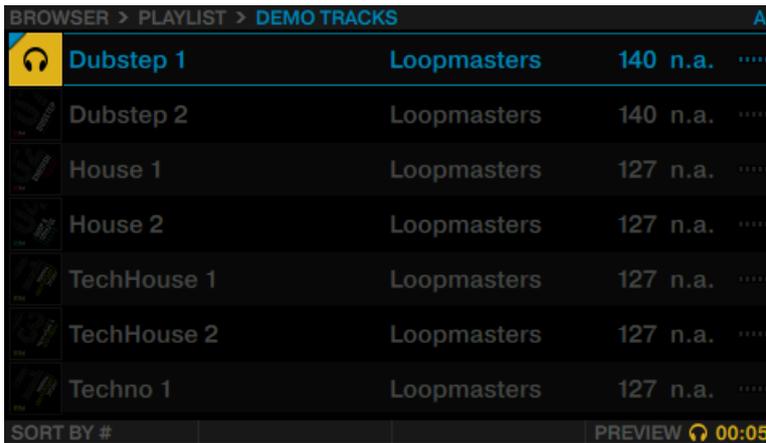

2. Rotate Performance knob 4 to seek within the track in preview.

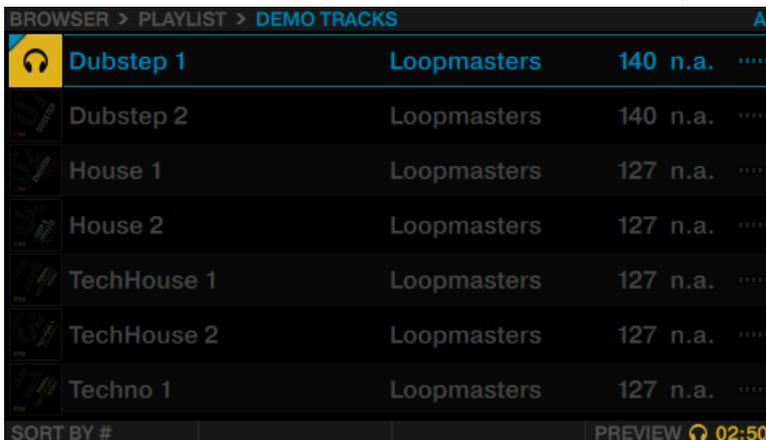


### 2.1.4 Sorting Tracks

To speed up scrolling through folders including a very large number of tracks, you can sort the tracks by categories **TITLE**, **ARTIST**, **BPM**, **IMPORT DATE**, **#**, and **KEY**. The selected category is displayed at the bottom-left in the Browser.


To sort your tracks by another category:

- ▶ Rotate Performance knob 1 until the desired category is selected in the SORT BY pop-up window. The tracks will then be resorted.

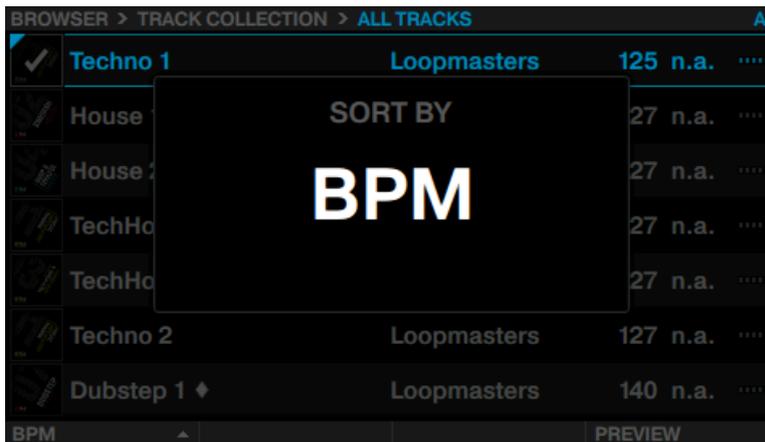


Additionally, you can display the tracks in ascending or descending order:

- ▶ Press the ON button 1 to switch between ascending and descending order.

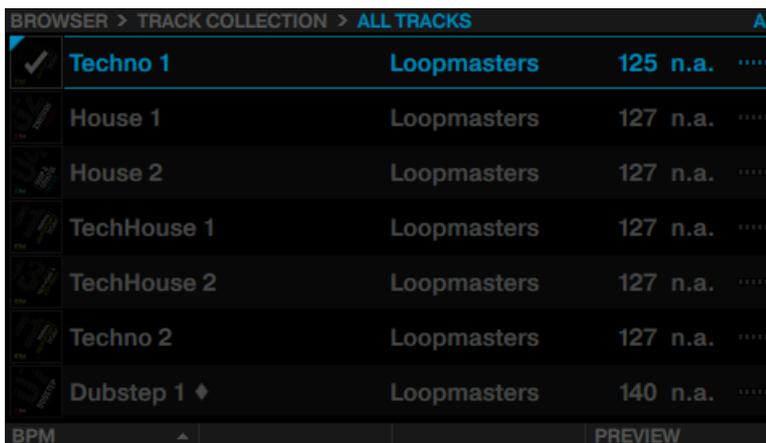


The Browser displaying tracks in descending order.

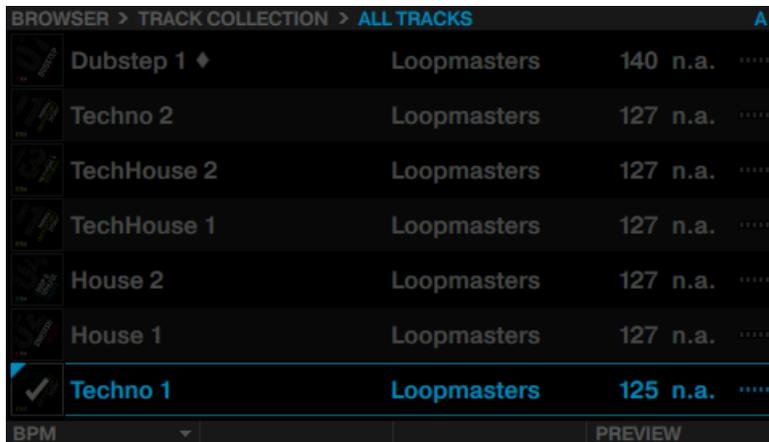

The Browser displaying tracks in ascending order.

## 2.2 Loading and Playing a Track


Let's load the track "Techno 1" from the included demo tracks on to Deck A. You can check this by looking at the display: you should see a blue indicator reading A:

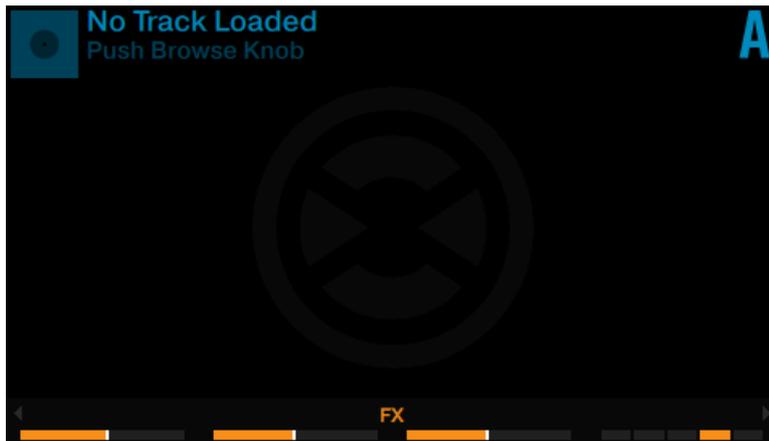

The Deck Display with DECK A indicator.

While looking at the display reading No Track Loaded. Push Browse Knob, do the following:


1. Press the **BROWSE** encoder to open the Browser.
2. Navigate to the folder **FAVORITES > Demo Tracks**.

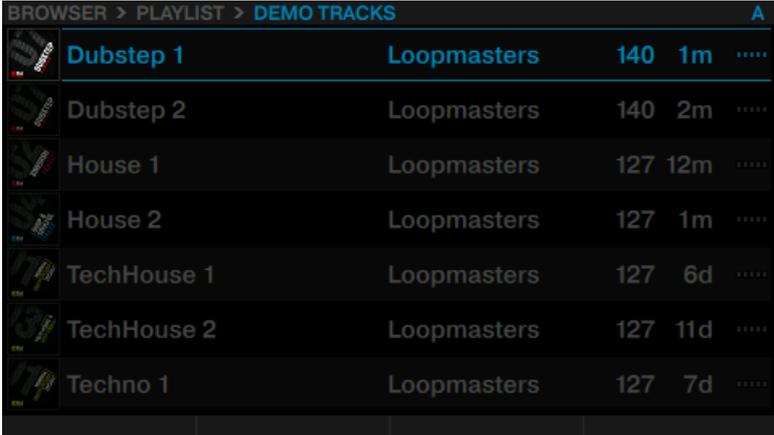

The screenshot shows the software interface with the breadcrumb path 'BROWSER > PLAYLIST > DEMO TRACKS' at the top. Below this is a list of tracks, each with a small album cover icon on the left, the track name, the artist name, the BPM, the duration, and a menu icon (three dots) on the right.

Track Name	Artist	BPM	Duration	Menu
Dubstep 1	Loopmasters	140	1m	.....
Dubstep 2	Loopmasters	140	2m	.....
House 1	Loopmasters	127	12m	.....
House 2	Loopmasters	127	1m	.....
TechHouse 1	Loopmasters	127	6d	.....
TechHouse 2	Loopmasters	127	11d	.....
Techno 1	Loopmasters	127	7d	.....

3. Scroll to track **Techno 1**.

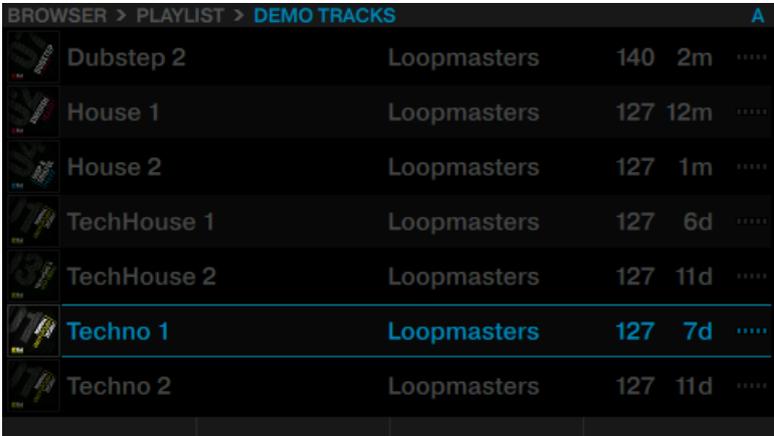

The screenshot shows the same software interface, but the track 'Techno 1' is now selected, indicated by a blue highlight and a blue underline. The breadcrumb path remains 'BROWSER > PLAYLIST > DEMO TRACKS'.

Track Name	Artist	BPM	Duration	Menu
Dubstep 2	Loopmasters	140	2m	.....
House 1	Loopmasters	127	12m	.....
House 2	Loopmasters	127	1m	.....
TechHouse 1	Loopmasters	127	6d	.....
TechHouse 2	Loopmasters	127	11d	.....
<b>Techno 1</b>	<b>Loopmasters</b>	<b>127</b>	<b>7d</b>	<b>.....</b>
Techno 2	Loopmasters	127	11d	.....

- Press the **BROWSE** encoder to load the track into Deck A.  
The track is loaded. Its waveform and info appear in the display.




- Press the **PLAY** button to start playback. The **PLAY** button lights up.  
→ The waveform starts moving in the display. The track is assigned to **MASTER**.

The track should now be audible on your mixer. If you don't hear the track, check the cable connections and read the manual of your mixer.

## 2.3 Switching Deck Focus

Although you can control four TRAKTOR Decks with the D2, it is only possible to have the focus on one Deck. To access the respective other Decks, you have to switch the Deck focus. Depending on the D2's Deck position you can either toggle between Deck A and C respectively Deck B and D by the following action:

- ▶ Press the **DECK** button.



- If Deck A or B is focused, the **DECK** button, the Mode Select Button and the LED ring around the LOOP encoder will be lit in blue.




- If Deck C or D is focused, the **DECK** button, the Mode Select Button and the LED ring around the LOOP encoder will be lit in white.



### Switch the D2's Deck Control

In order to access the other Deck side:

1. Hold the **DECK** button. The two "Deck Assign" buttons of the current Deck side lit up brightly.



2. Press one of the dim lit Deck Assign buttons to switch to the other Deck side.



3. Release the **DECK** button.


## 2.4 Switching Deck View and Zooming

By default, the display shows only the focused Deck. This is called Single View. Additionally, you can switch to Split View to show both Decks together in the display - Decks A and C on the left side, Decks B and D on the right side. The display focused on just one Deck has the following appearance:




Deck A in Single View

- ▶ Press the View button located in the top-right corner of the display area to toggle Deck View between Single View and Split View.




→ The display now shows both Decks in Split View.

The focused Deck always acquires the majority of space in the display.

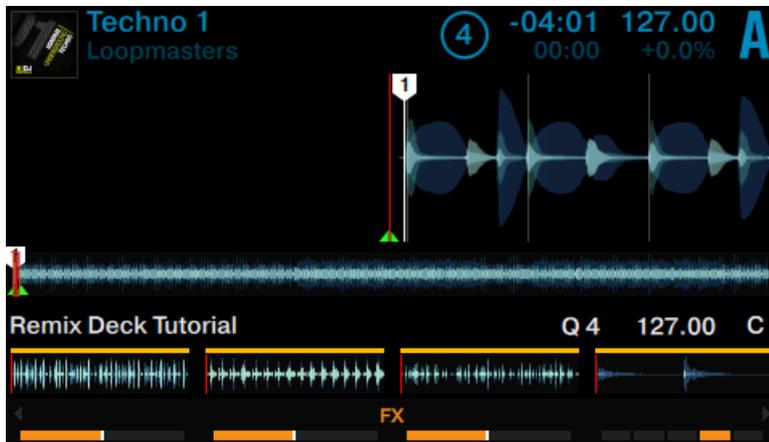

Split View with focus on Deck A.

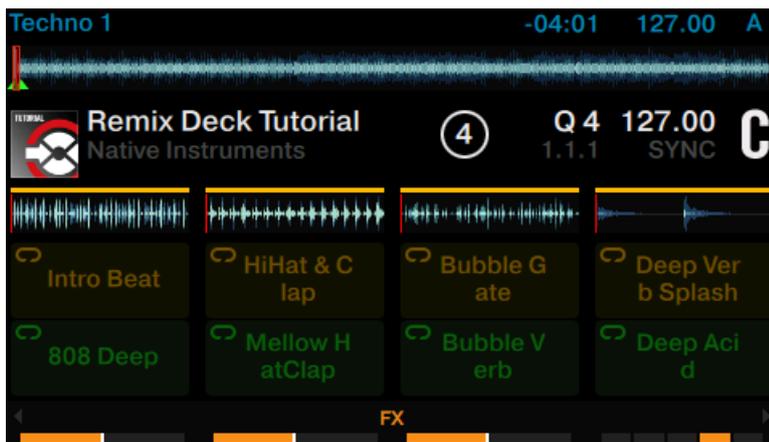

Split View with focus on Deck C.



Changing Deck View does not change the Deck's focus.

## Zooming

To get a more precise view of the waveform at the current Playhead position, you can zoom in or out of the waveform.

To zoom into the waveform:

- ▶ Press Display button 3 repeatedly until you reach the desired zoom level.



To zoom out of the waveform:


- ▶ Press Display button 4 several times until you reach the desired zoom level.



## 2.5 Using Cue Points

This tutorial will explain how to work with HotCues for jumping directly to certain points within a track. HotCues can be assigned to the pads when the Track Deck is in HOTCUE mode.

On a Track Deck in HOTCUE mode, pad 1 always represents the Start Cue Point that will be assigned automatically as soon as a track is loaded. The remaining pads can be assigned with further HotCues, as explained in the following section.

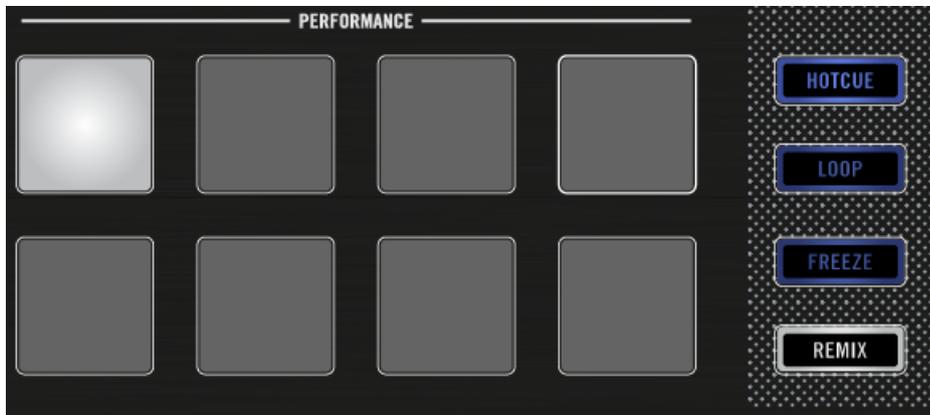

Pad 1 as Start Cue Point.

## Prerequisites


We assume here that you already followed the instructions in the previous tutorials (see Enabling Decks). TRAKTOR KONTROL D2 is in the following state:

- The track “Techno 1” is loaded on Deck A.
- The Deck A is set to HOTCUE mode (default state).

### 2.5.1 Setting and Deleting Cue Points (HotCues)

To set Cue Points within a track:

- ▶ Whether or not the track is playing, press one of the unlit pads on a downbeat—let's say pad 2. The pad lights up blue.

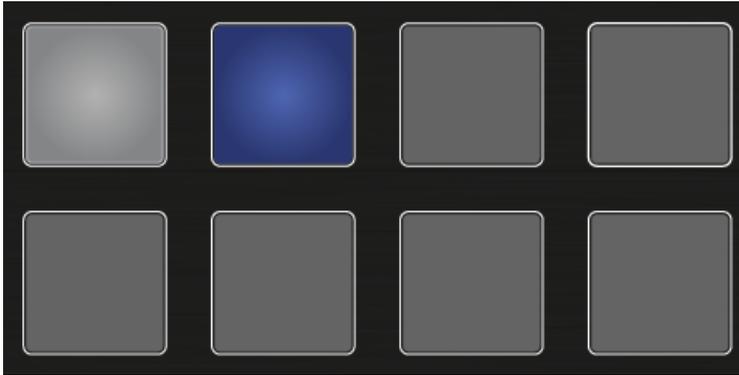

→ You have just stored a Cue Point that you can return to by pressing the same pad again.

- ▶ In the display, a CuePoint will be highlighted by a blue indicator and the pad number. You can store up to eight CuePoints per track, including the first which is automatically set to the track start.



The highlighted CuePoint in the display.

To delete a Cue Point:

▶ Press **SHIFT** + the pad assigned with a Cue Point.

→ The Cue point is deleted and the pad is unlit.

## Snapping to the Beats

You don't have to worry about being precise enough to set a HotCue directly on a beat; by default, TRAKTOR will make sure this happens automatically. This is because the Snap mode is on, indicated by the lit **S** button located in the top-mid in the TRAKTOR software:



The S and Q button in the TRAKTOR software.

With Snap mode on, any HotCue you set in the track will snap to the closest beat, thus ensuring that recalling a CuePoint will always trigger a downbeat.

### 2.5.2 Aligning Tracks using HotCues

Aligning two tracks is straightforward:

1. Make sure that Deck C is playing.
  1. When you hear a downbeat in the other track, press the pad with the HotCue you just used to store the downbeat position.
- The playback position on Deck B jumps to the stored Cue Point, and the playback continues from there. Both tracks now are perfectly aligned and ready to be mixed.

## 2.6 Adjusting Deck-specific tempo


Deck-specific tempo adjustments can be made by using **BPM** mode:

## Adjusting the Deck-specific Tempo

1. Press the Display Button 1.



The BPM pop-up becomes visible on the display.

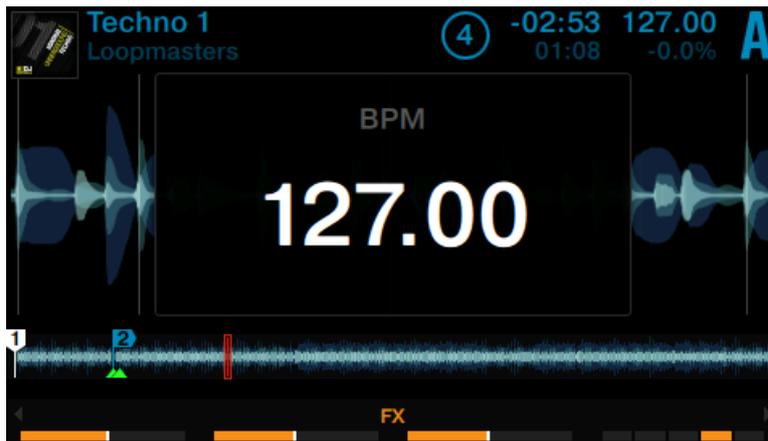

- Turn the **BROWSE** encoder clockwise to increase the tempo; turn the **BROWSE** encoder counterclockwise to decrease the tempo.



- Hold the **SHIFT** button + turn the **BROWSE** encoder clockwise to increase the tempo in whole steps; turn the **BROWSE** encoder counterclockwise to decrease the tempo in whole steps.



- Press the Display Button 1 again or press the View Button to close the BPM pop-up.  
→ The Deck-specific tempo has changed.

If the Deck is assigned as the **MASTER**, tempo adjustments made with the **BROWSE** encoder will also be applied to any other Deck with their **SYNC** button activated.



In scenarios where automatic Deck synchronization is not possible, e.g. syncing a TRAKTOR Deck with an external audio source, you can use this method to manually dial in a Deck's BPM.

## 2.7 Using Keylock

When synchronizing tracks, you end up altering at least one track's tempo, which consequently changes their pitch (or key). For small tempo adjustments, this mostly isn't going to be an issue; but when the tempo is changed more significantly, the resulting pitch change might sound unsuitable: kick sounds would lose their impact, vocals would sound unrealistic, harmonic instruments would become dissonant when mixed, etc. To avoid issues like these, TRAKTOR provides the **Keylock** feature which uncouples the pitch and the tempo of a track. This allows you to basically lock the pitch while adjusting the tempo or vice versa. In order to activate Keylock from the D2, do the following:

### Prerequisites

We assume here that the D2 is in the following state:

- The track “Techno 1” is loaded on Deck A and playing.

### Adjusting the Tempo and preserving the Original Pitch

If you want to mix a track in its original key to another track with a faster tempo, you need to lock the key before adjusting the tempo of the track:


1. On a Deck, press the Display Button 2.



The KEY pop-up opens on the display. For tracks which have been analyzed by TRAKTOR, their key is displayed here.



- Press the Deck's **BROWSE** encoder to enable Keylock on the track. **LOCK** is now lit in white.

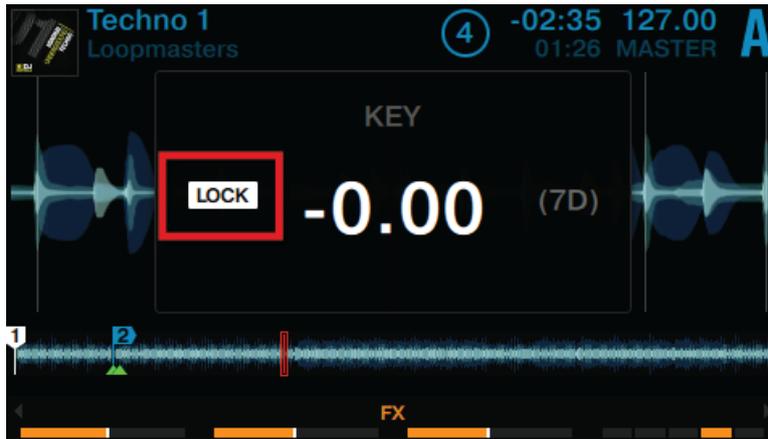

- Press the Display Button 2 again to exit the KEY pop-up in the display.
- Now press Display Button 1 to open the BPM pop-up and adjust the track's tempo by turning the **BROWSE** encoder.




→ You can hear the tempo change, but the track's key remains intact.


## Adjusting the Key without changing Original Tempo

If you want to change just the key of a track without affecting its tempo, proceed as follows:


1. On a Deck, press the Display Button 2.



The KEY pop-up opens on the display. If the track has been analyzed by TRAKTOR, its key will be displayed here.

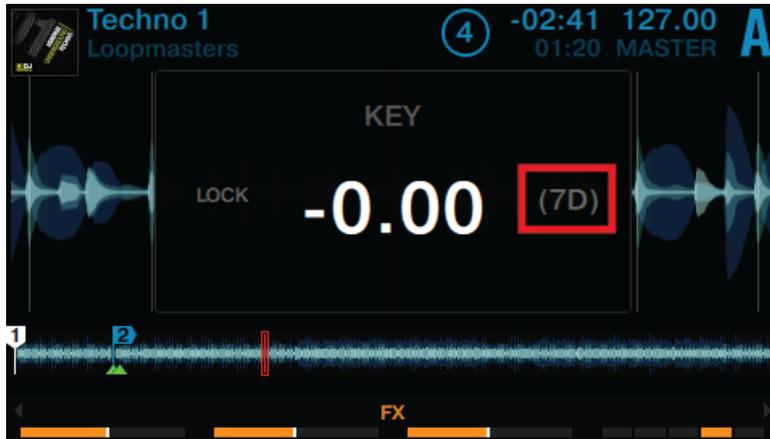

- Press the Deck's **BROWSE** encoder to enable Keylock on the track. **LOCK** is now lit in white.

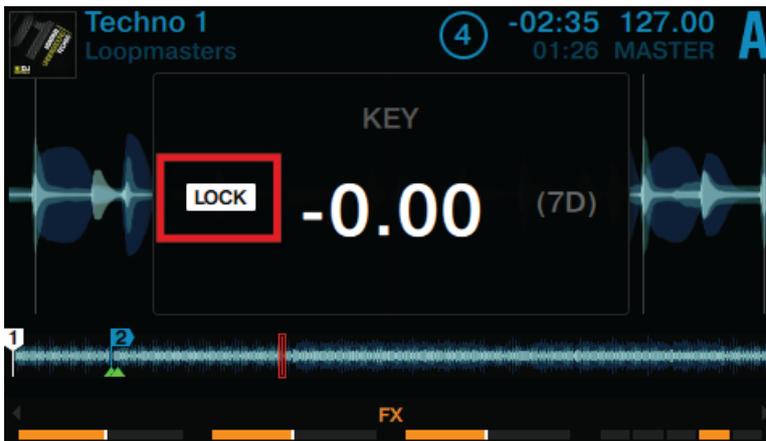

- Now turn the Deck's **BROWSE** encoder to adjust the key of the track.



- Press the Display Button 2 again to exit the **KEY** window in the display.  
→ You will hear that the track's key has changed, while the tempo is preserved.

## 3 Using Your D2—Getting Advanced

### 3.1 Using Touch Strip

D2 doesn't feature the conventional Jog Wheel of a regular DJ controller. Functions usually associated with Jog Wheel are instead controlled by the intuitive Touch Strip. This tutorial explains how to use the Touch Strip for the following actions:

- Seek/navigate through the entire track.
- Tempo bend (nudge).
- Scratching, backspinning and holding.

#### Prerequisites

We assume here that the D2 is in the following state:

- The track “Techno 1” is loaded on Deck A and is not playing.

#### 3.1.1 Using Touch Strip to Seek

Press the **PLAY** button.


1. While holding the **SHIFT** button, the LED strip above the recessed touch-sensitive area will display this:



The LED segments represent the entire length of the track. The three orange segments represent the current playhead position within the track.




1. While holding **SHIFT**, place your finger on the Touch Strip beneath the orange LEDs and swipe to the right to move forwards in the track's waveform.

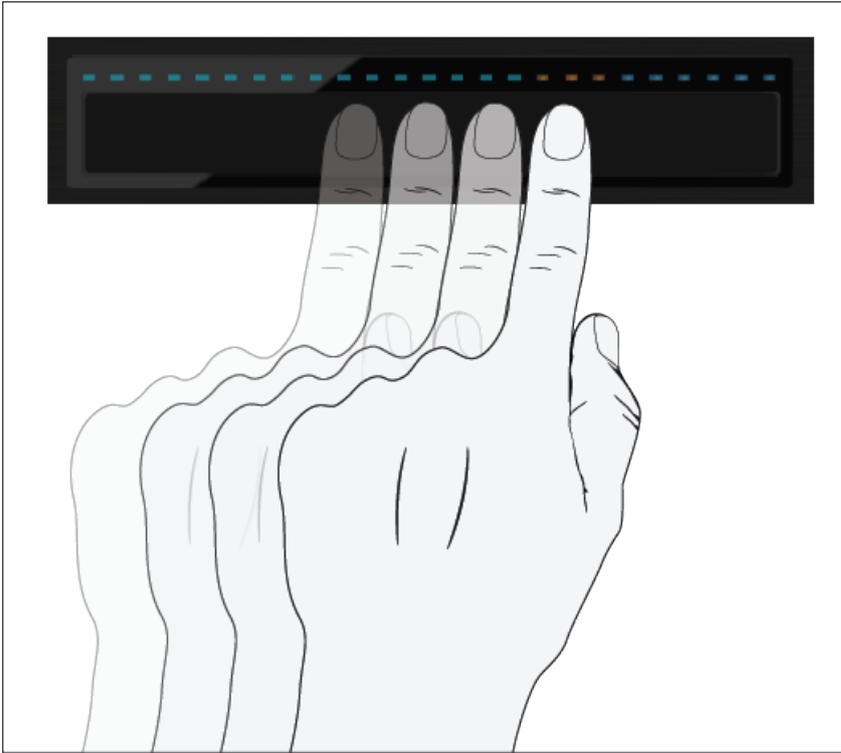


The three orange LEDs will follow your finger movement to the right, as does the playhead in the waveform.



2. Swipe your finger to the left to move backwards in the track's waveform.

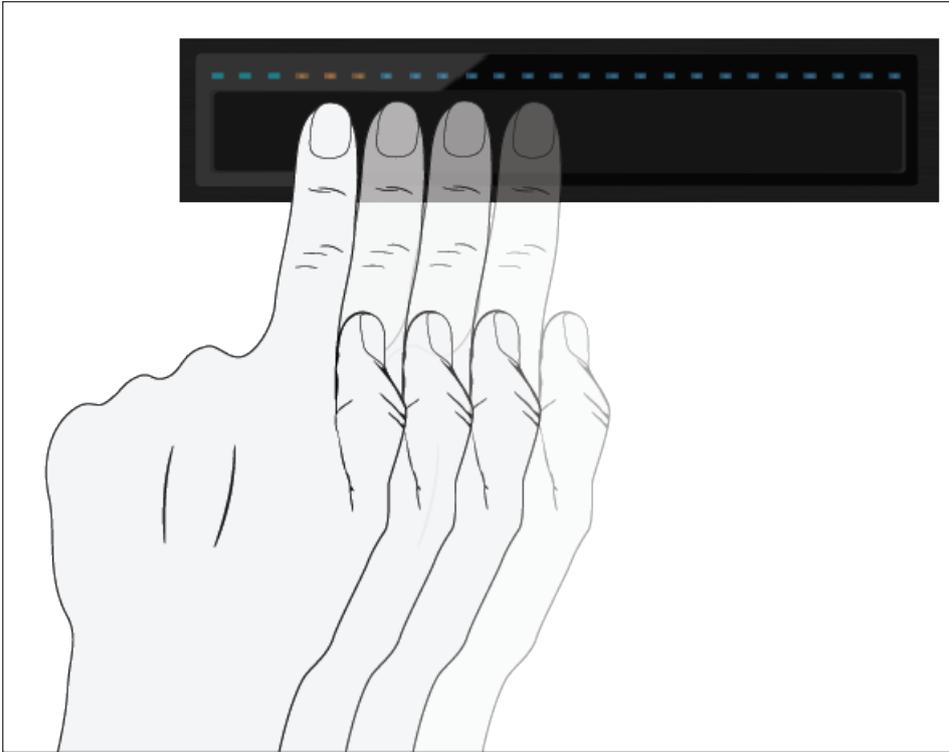

The three orange LEDs will follow your finger movement to the left, just as the playhead in the waveform.

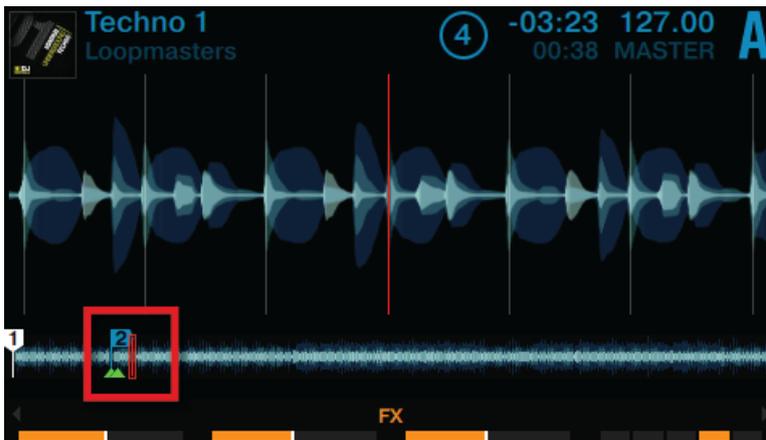



Alternatively, you can jump directly to an absolute position in the track by pressing **SHIFT** + placing your finger on the desired position on the Touch Strip.

### 3.1.2 Using Touch Strip to Nudge/Pitchbend

Traditional DJ's who don't have an automatic Sync function at hand are used to physically nudging, twisting, and tweaking a conventional turntable with either Timecode vinyl or traditional vinyl to temporarily speed up or slow down a track and align the beats manually. The D2 allows you to work in a similar way by using the Touch Strip:

The LEDs above the Touch Strip provide visual information about a Deck's phase alignment. They help you make the necessary tempo bend adjustments to get your tracks aligned.

The following tutorial will demonstrate how to manually beatmatch the two demo tracks "Techno 1" loaded on Deck A and "Techno 2" loaded on Deck B by means of the Touch Strip, without using the Sync function.


#### First step: Playing the Tracks

1. On Deck A press the **PLAY** button to start playback. The Deck will be assigned to **MASTER**.
2. On Deck B press the **SYNC** button to disable Sync. The **SYNC** button's backlight goes dim.
3. Listen to the track playing in Deck A, and press the **PLAY** button of deck B on an appropriate downbeat to start playback.

- If your timing was perfect, a single orange LED at the center of the LED strip lights up, indicating the phase-alignment of both tracks is correct.



If your timing was a little off, a few blue LEDs above the Touch Strip light up, indicating the amount of phase-misalignment.

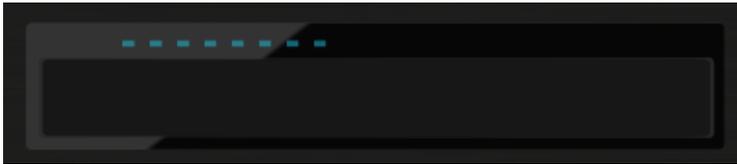

### **Second Step: Correcting phase-alignment**


To correct the phase-alignment of both tracks, proceed as follows:

If blue LEDs are shown above the right side of the Touch Strip on the Deck not assigned to MASTER:


- ▶ Swipe your finger toward the left side of the Touch Strip until the blue LEDs disappear and a single orange LED is shown.

If blue LEDs are shown above the left side of the Touch Strip on the Deck not assigned to MASTER:

- ▶ Swipe your finger toward the right side of the Touch Strip until the blue LEDs disappear and a single orange LED is shown.

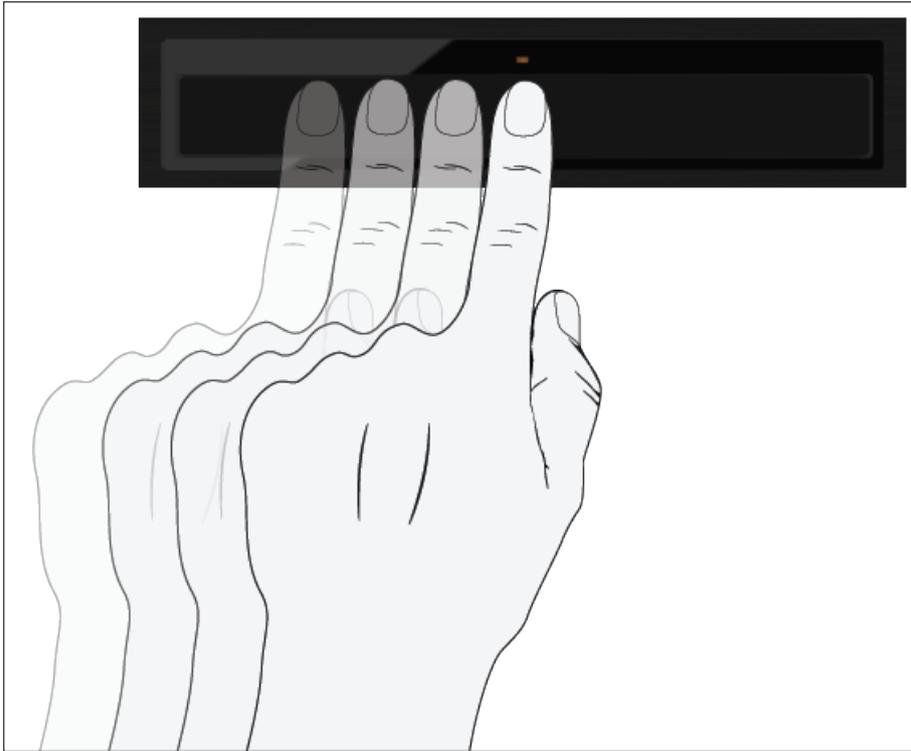

- The phase-alignment is corrected and both tracks are perfectly synced.

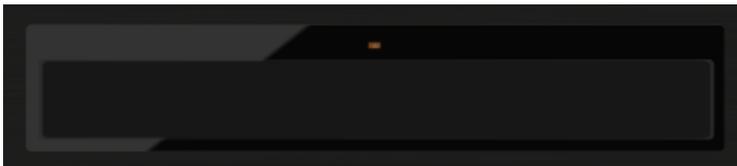


### 3.1.3 Using the Touch Strip to Scratch and Backspin

Similar to manually turning a vinyl on a turntable, swiping a finger over the recessed Touch Strip area allows you to create a scratch effect on a Track Deck or Remix Deck. This feature is not enabled by default and requires some configuration as follows:

To enable the preference Touch to Scratch for the D2:

1. In the TRAKTOR window click *File*, then *Preferences* to open the preferences window.

- Navigate to the [Traktor Kontrol D2](#) window, check the [Shift + Touch to Scratch](#) preference in the [Touchstrip](#) section.

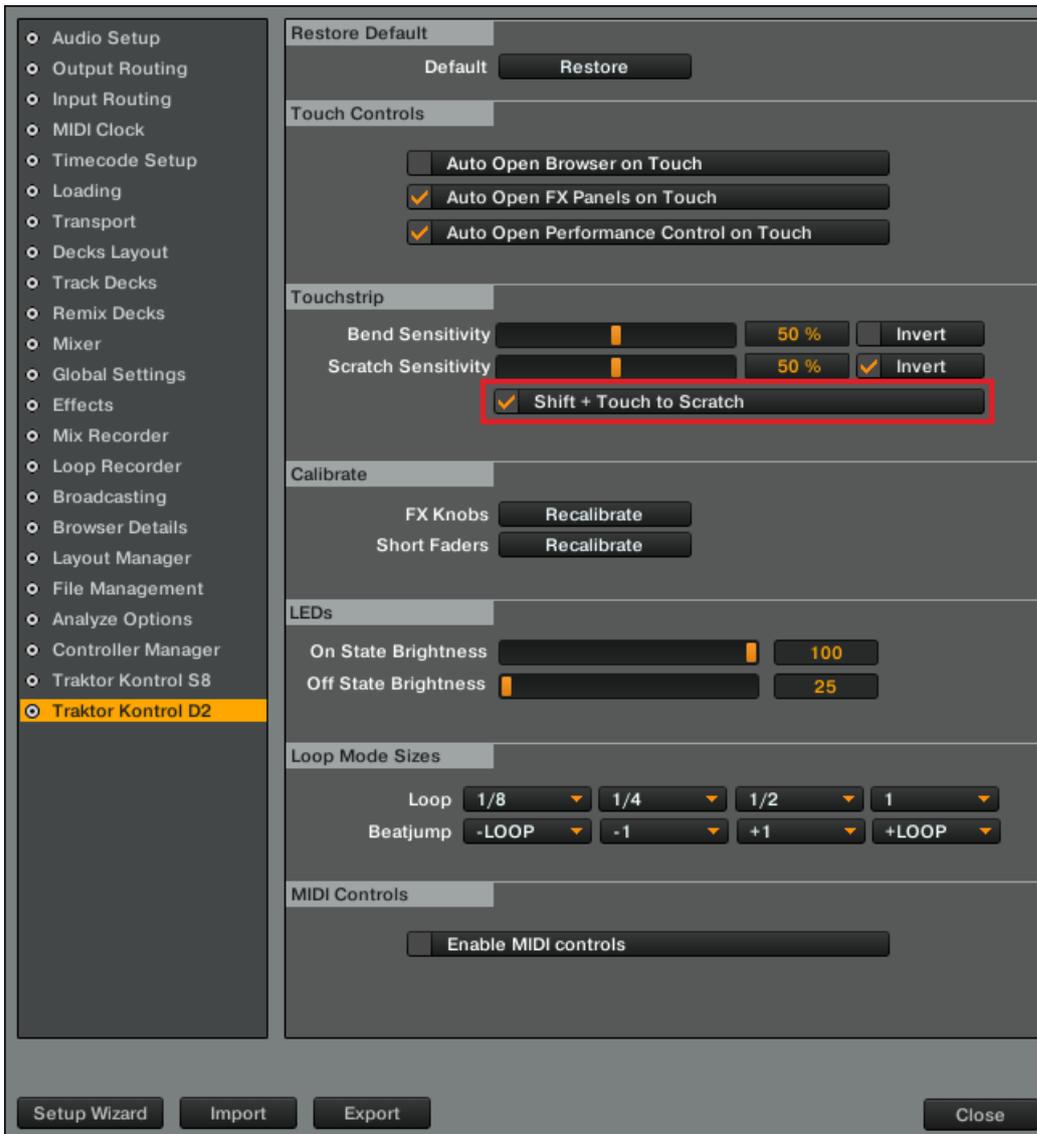


3. Click on [Close](#) to exit the Preferences window.


### Performing Scratching

On the Deck:


1. Hold the **SHIFT** button.
2. On the Touch Strip swipe to the left. This will move the playhead slightly forwards in the track's waveform, and you will hear the typical scratch effect.

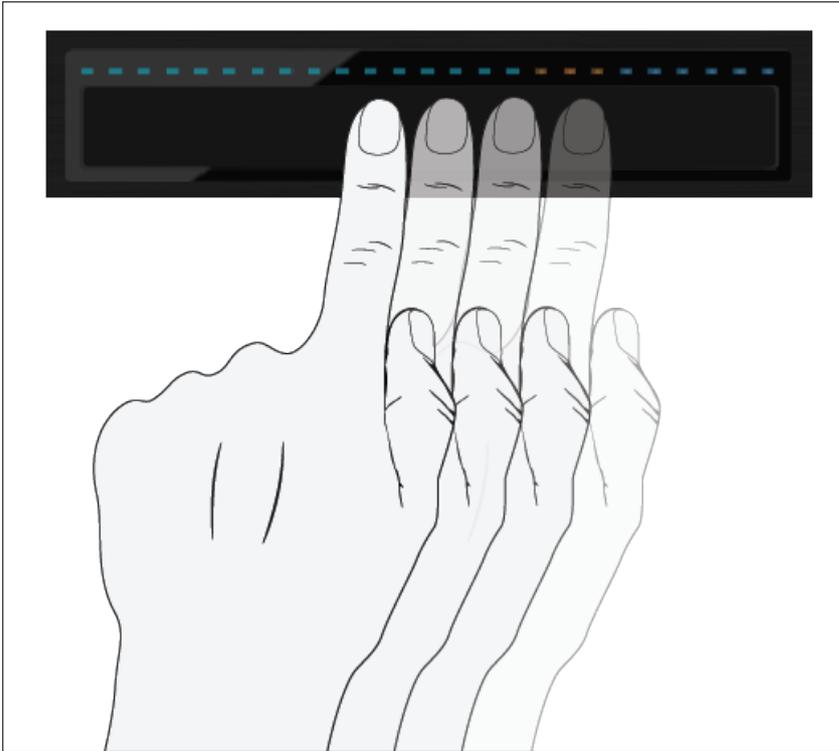

3. On the Touch Strip swipe to the right. This will move the playhead slightly backwards in the track's waveform and you will hear the typical scratch effect.

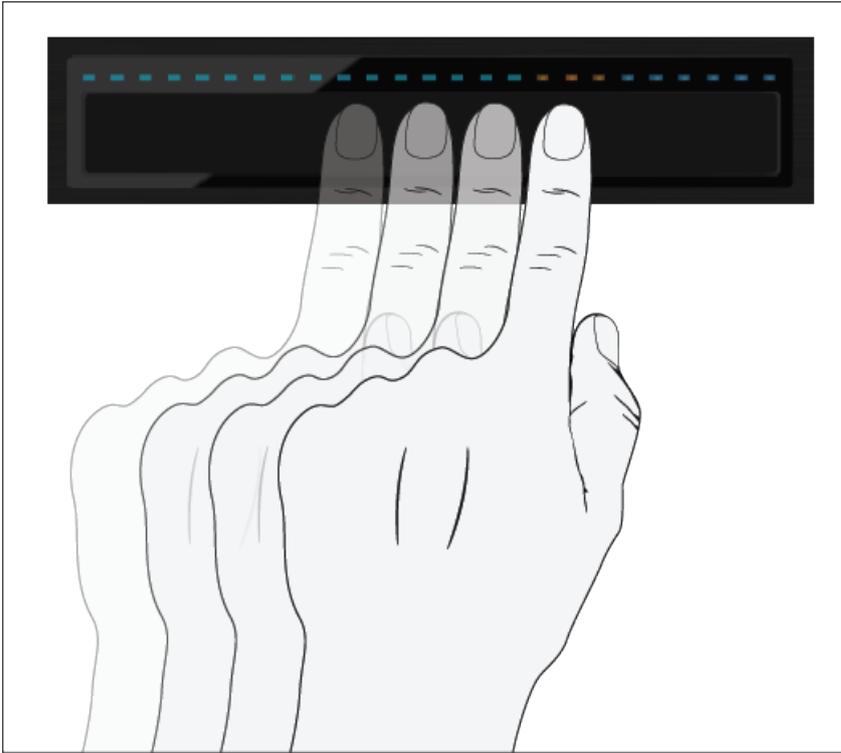

4. Try moving your finger across the Touch Strip (back and forth) to scratch the corresponding playhead over a beat.

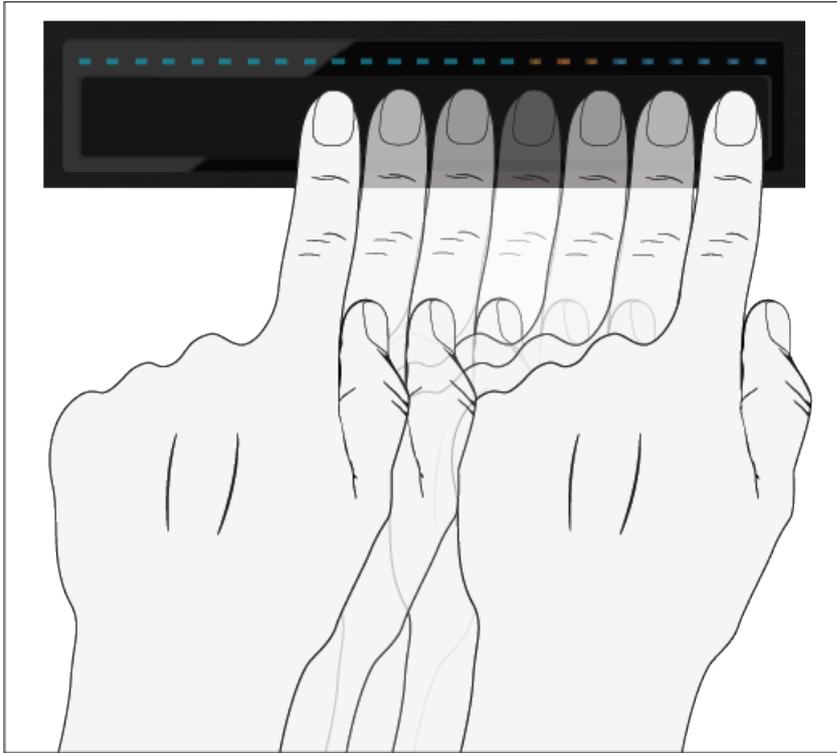

- As soon as you cease moving your finger on the Touch Strip, the playhead remains at that position.




A scratch effect can only be created when the track is stopped.

## Performing a Backspin

On the Deck:

1. Hold the **SHIFT** button.

2. On the Touch Strip swipe quickly from the very right to the very left. This will move the playhead backward in the track's waveform, and you will hear the backspin effect.

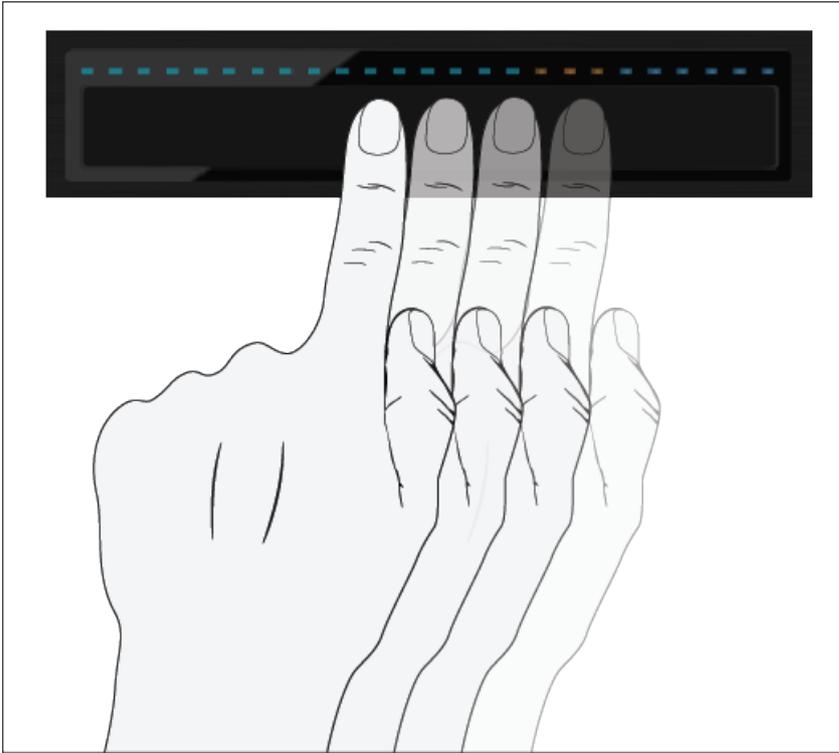

- As soon as you lift your finger from the Touch Strip, the playhead remains at that position.



Backspins are enhanced by the fact that TRAKTOR will stop the spin as soon as you release the SHIFT button.

## 3.2 Playing with Loops in HOTCUE Mode

Now that we've covered all basic mixing techniques and how to use the Touch Strip, we will focus on D2's looping facilities in HOTCUE mode.

Besides using the dedicated LOOP mode which will be explained in the next tutorial, you can work with loops in default HOTCUE mode. This allows you to perform with HOTCUES and loops at the same time.

## Prerequisites

We assume here that the D2 is in the following state:

- The track “Techno 1” is loaded on Deck A and stopped.

### 3.2.1 Engaging and Disengaging a Loop

Let’s add a loop to the track on Deck A.

To engage a loop on a Deck:

1. Press the **PLAY** button to start playback.
2. Press the **HOTCUE** button to enable HOTCUE mode.



3. Press the LOOP encoder. The LED ring around the LOOP encoder starts to rotate to indicate the loop is activated.

→ This will automatically add a loop at the current playback position in the track.



The example above shows an engaged loop of four beats. You can change the loop size while the loop is active:

- ▶ Turn the LOOP encoder to change the loop size.



You can choose a loop size of 32 beats down to a loop size of 1/32 of a beat.



Note that you can adjust the loop size either before or after you've set the Loop! If you adjust the loop size beforehand, the next loop you set will acquire the set loop size value.

To deactivate the active Loop:

- ▶ Press the LOOP encoder again.
- Playback continues as normal.



By pushing the LOOP encoder when there is no Loop active, you activate looping: the next Loop in the track will be activated.

### 3.2.2 Moving a Loop

With a loop size selected, you can move the Loop selection to another position within your track.

To move the Loop:

- ▶ Press the **SHIFT** button and turn the LOOP encoder. The loop selection will be moved through the track on the fly and looping continues at the respective position.



The step size you move the selection by is the same as the loop size, which is shown in the display.



Turning the LOOP encoder when there is no Loop active lets you jump backward/forward through the track by the same step size.

### 3.2.3 Storing a Loop

In a previous tutorial, you learned how to store Cue Points, which is as simple as pressing an unlit pad. Storing Loops works in a similar way. Let's say you have stored two HotCues in the track currently playing:

1. Press the LOOP encoder to engage a Loop.
2. To store the active Loop, press an unlit pad. The pad lights up green.



The display will show a green marker indicating the Loop. The marker also shows the number of the corresponding pad.



→ You have just stored a Loop that you can return to by pressing the same pad again.

### Deleting a Loop

To delete a Loop:

- ▶ Press the **SHIFT** button and the pad assigned to the Loop you want to delete.

## 3.3 Playing with Loops in LOOP Mode

LOOP mode offers a different set of control options for using loops on track Decks and Remix Decks, which you will learn in the following tutorial.

When LOOP mode is activated, the top row of pads light up in green and the bottom row of pads light up in orange. The green pads represent four Loop sizes. The orange pads represent Beatjump sizes.



Pads illuminated in Loop Mode.

## Prerequisites

We assume here that the D2 is in the following state:

- The track “Techno 1” is loaded on Deck A and is not playing.

### 3.3.1 Looping with Pre-defined Sizes

In LOOP mode, with the first row of pads you can engage loops with pre-defined values. By default, these are (from left to right) 1/8, 1/4, 1/2 or 1 beat.

To engage a loop:

1. Press the **PLAY** button to start playback.
2. Press the **LOOP** button to enable LOOP mode.



The LOOP button lights up brightly and the pads also illuminate.

With a track playing and LOOP Mode enabled, you can perform the following actions:

- ▶ Press one of the green pads to engage a Loop of 1/8 beat, 1/4 beat, 1/2 beat, or 1 beat. The LED ring around the LOOP encoder starts to rotate indicating a loop is engaged.



- ▶ Press the same green pad again or press the LOOP encoder to disengage the Loop.
- ▶ While a loop is engaged, rotate the LOOP encoder to alter the LOOP's size. This will produce some interesting sound variations.



Loop sizes can be changed in TRAKTOR's software preferences: *Preferences>TRAKTOR KONTROL D2>Loop Mode Sizes>Loop.*

### 3.3.2 Beatjumping

With the orange pads, you can jump forward or backward in the track by the amount predefined as Beatjump size. By default, the orange pads 6 and 7 represent the Beatjump sizes of 1 beat backward and forward, whereas the beat-jump sizes of pad 5 and 8 are defined by the Loop encoder.

To beat-jump within a track by 1 beat:

1. Press the **PLAY** button to start playback.

2. Press the **LOOP** button to enable LOOP mode.



The LOOP button lights up brightly and the pads also illuminate.

3. Press pad 6 to jump back by 1 beat. If doing so causes the Playhead to cross the boundaries of an active Loop area, it continues to loop again.
4. Press pad 7 to jump forward by 1 beat. If jumped out of a loop, playback continues as normal.



Beatjump sizes can be changed in TRAKTOR's software preferences: *Preferences>TRAKTOR KONTROL D2>Loop Mode Sizes>Beatjump.*

### Using the Loop encoder to define Beatjump sizes in real time

By default, pad 5 and pad 8 skip position back and forward by the amount shown in the display as loop-size value. To change this value:

1. Turn the Loop encoder to define a Beatjump size between 1/32 of a beat and 32 beats. The Loop size will change in the display.
2. Press pad 5 to jump the playback position backward by the loop-size value displayed on the display. If doing so causes the Playhead to jump into an active Loop area, it continues to loop again.
3. Press pad 8 to jump the playback position forward by the beat-jump size defined in the display. If you jump out of a loop this way, playback continues outside the loop.

## 3.4 Using FREEZE Mode

FREEZE mode takes the playhead position, adds the number of bars set as Freeze Slice Size and splits this section of a track into eight equally sized slices. These are then mapped to the adjacent pads, which light up blue. Press any of these pads to trigger playback from the mapped slice. Playback continues to the end of the track until you lift your finger off the pad.

In FREEZE mode, the numbers 1 - 8 are overlaid on the waveform to indicate the location of the slices. The first row of pads triggers slices 1 - 4, the second row triggers slices 5 - 8



FREEZE overlay in the display.

The pads are now lit blue, and the Freeze slices are shown on the track's waveform. The pad that is currently illuminated brightest represents the current playback position in the Freeze area (see the image above).



Deck A in Freeze Mode.

## Prerequisites

We assume here that the D2 s in the following state:

- The track “Techno 1” is loaded on Deck A and stopped.

### 3.4.1 Engaging Freeze mode on a track

On Deck A:

1. Press **PLAY** to trigger playback.



2. Press the **FREEZE** button.



The current playback position is "frozen" and a section defined by the loop size on the display is automatically split into eight slices.



3. Press any of the eight pads to trigger playback and get a feel for the slices.



4. Press the **HOTCUE** button to exit Freeze mode.

If no further slice is triggered, the Playhead position will leave the frozen area and playback continues towards the end of the track.


### 3.4.2 Adjusting the Freeze Slice Size

1. Hold the **FREEZE** button.



The SLICE SIZE window pops up in the display.

2. While holding the **FREEZE** button, turn the Loop encoder to increase or decrease the slice size from a 1/4 of a beat to a range of 4 beats.

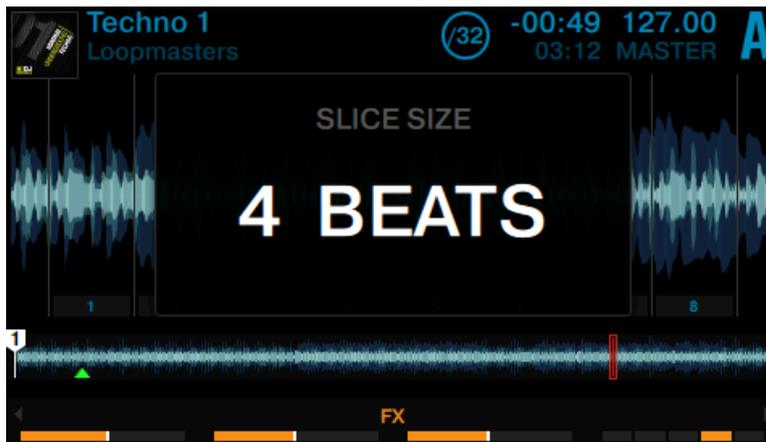


3. Release the **FREEZE** button.

→ The Slice size and zoom will change accordingly.



### 3.4.3 Slicer Mode

There's an extension of Freeze mode's functionality, called Slicer Mode. Press the Loop button while in Freeze mode and the playback behavior of the pads changes. Instead of playing from the slice start to the end of the entire track, pressing and holding a pad in Slicer Mode will play back just the corresponding slice repeatedly

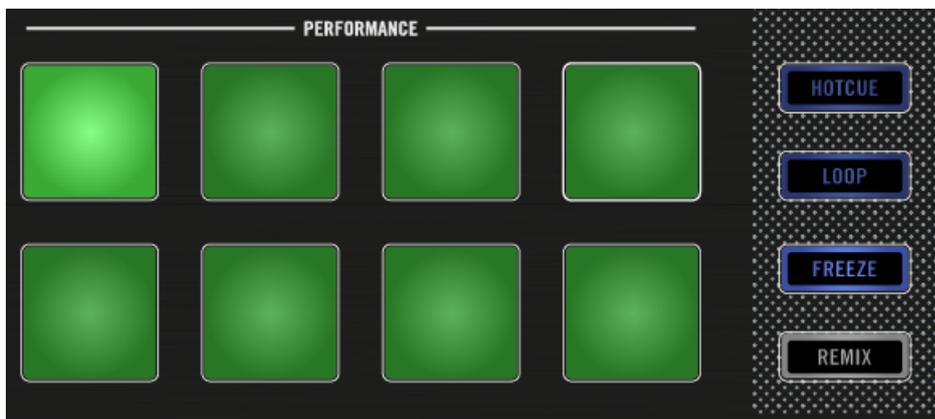

Slicer mode enabled.

To enable Slicer Mode on a Deck:

1. Turn the Loop encoder to define the desired Loop size.



2. Press the Loop encoder to engage a loop.



- Press the **FREEZE** button to engage Slicer mode to the active loop.



The Slices appear in green.



While Slicer mode is engaged you can perform the following actions:

- ▶ Press any of the pads to jump between the Slices.



- ▶ Hold a pad to retrigger its slice.



- ▶ Hold two pads simultaneously to loop the entire area between the first and last selected slice.



- ▶ Turn the Loop encoder to change the Loop size. The slice size will be changed on the fly and the waveform in the display adjusts its zoom accordingly.



- ▶ Press the Loop encoder or the **HOTCUE** button to exit Slicer mode. Playback continues as normal.

### 3.5 Using FLUX Mode

With FLUX mode activated, for every Deck, a second Playhead continues playing along the natural progression of a track, even if you loop a section, temporarily jump back to a cue point, skip forward or backward, etc. That way, the beat of a track keeps flowing, no matter what you do. These are the changes in FLUX mode compared to regular operation:

- **HOTCUE** mode: press and hold a pad to play back from a cue point. When you let go, playback resumes at the second Playhead's position instead of continuing from the cue point.
- **LOOP** mode: when leaving a loop, playback will continue at the position of the second Playhead instead of the loop end position
- **FREEZE** mode: press and hold a pad to play back from a cue point. When you let go, playback resumes at the second Playhead's position instead of continuing playback from the cue point.

## Prerequisites

We assume here that the D2 is in the following state:

- The track “Techno 1” is loaded on Deck A and stopped.

## Enabling Flux Mode

To enable Flux mode within HOTCUE mode, LOOP mode, or FREEZE mode on Deck A:

1. Press the **PLAY** button to start playback.
2. Press the **FLUX** button to enable FLUX mode. The button lights up in orange.



3. Perform on the pads as usual. As soon as a pad is released, playback continues at the second Playhead's position to preserve the musical phrasing.
4. Press the **FLUX** button again to exit FLUX mode.



Note that when the **FLUX** button is engaged, you cannot make use of Slicer mode on the pads.

If the option Touch to Scratch is enabled in the TRAKTOR Preferences you can perform a backspin effect for two beats by using FLUX mode:

1. Press the **FLUX** button to enable FLUX mode.
  2. Hold the **SHIFT** button, and swipe quickly from the very right to the very left on the Touch Strip.
  3. Two beats later, release the **SHIFT** button.
- The Backspin will stop and normal playback will resume right on the beat you desire.

## 3.6 Remixing with Remix Decks


In the previous tutorials you learned how to mix using the Track Decks and how to work with some advanced functionalities of the D2. In this tutorial, you will learn how to use the Remix Decks. With the Remix Decks you can play and perform with pre-defined Remix Sets as well as create your own Remix Sets by capturing samples of tracks.

### Prerequisites

- Deck C is enabled.
- All Remix Slot Volume Faders are raised.


#### 3.6.1 Loading a Remix Set

1. Press the **DECK** button to switch to Deck C. Remix Deck C should be shown in the left display.

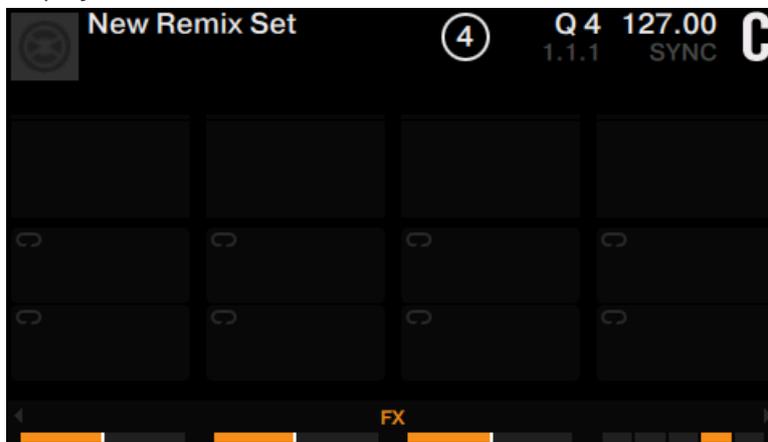

1. Press the **BROWSE** encoder to open the Browser.
2. Navigate to the folder **TRACK COLLECTION > All Remix Sets > Remix Deck Tutorial**.

3. Select the Remix Set **Remix Deck Tutorial** and press the **BROWSE** encoder to load it.

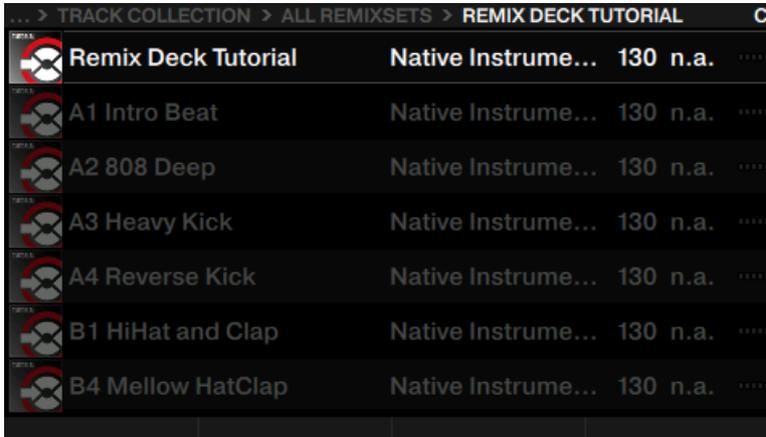

→ The Remix set is loaded to Deck C. The display has the following appearance:




The pads now illuminate orange and green, corresponding to the Remix Deck page shown in the display.




### 3.6.2 Triggering Samples

For a demonstration of how a Remix Deck works, please perform the actions listed below in the following order:

1. Press pad 1 to trigger its Sample Intro Beat. Playback of the Deck will start accordingly.

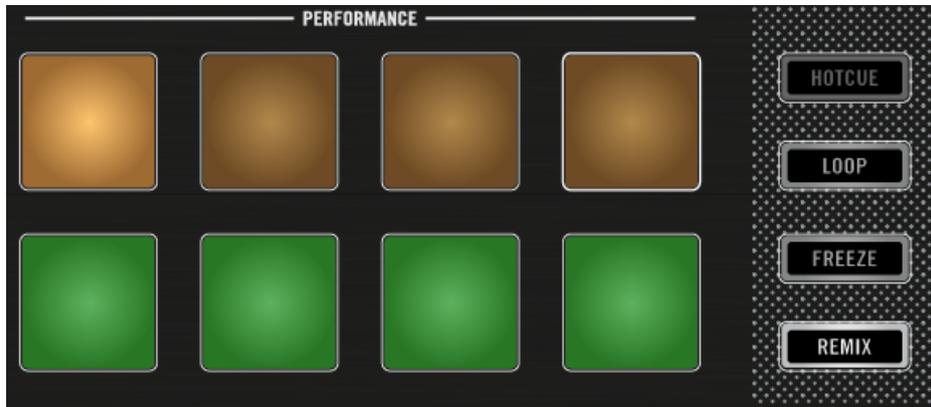

The Sample is highlighted, the Playhead of its waveform moves, and the Sample will loop.

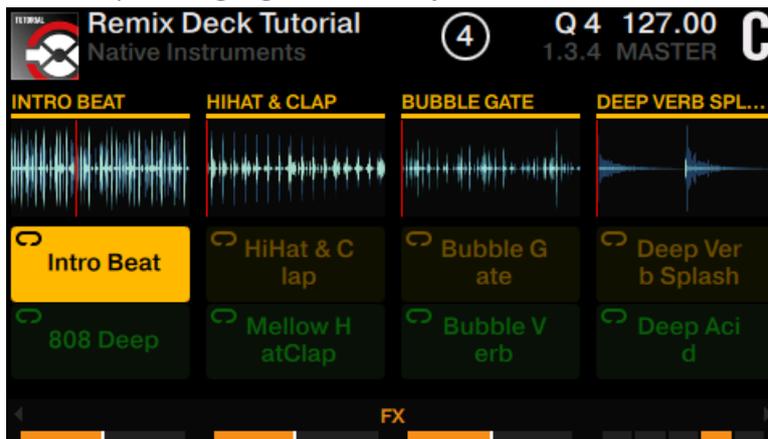

2. Press **SHIFT** + pad 1 to stop playback.
3. Now press pad 1, pad 2, pad 3, and pad 4 to trigger their samples.

→ The first four pads light up.



The Samples play back.



### Select another Sample of a Remix Slot

While the Samples are playing, you can switch to other Samples within the Remix Slots. For example:

- ▶ Press pad 5. The Sample of pad 1 Intro Beat will stop and instead the Sample of pad 5 808 Deep will start without interruption.



The Sample of pad 5 808 Deep is highlighted in the display.



Note that only one Sample per Remix Slot (column in the display) can play at a time.

### Select other Pages of a Remix Set


A Remix Set can include up to 64 samples. On the D2 controller, the Remix Set is split into eight pages where each set of eight samples is stored.

To select another page of a Remix Set:

- ▶ Press Display Button 4 or 3 to scroll a page downwards or upwards.



Alternatively, hold the REMIX button while turning the Deck's LOOP encoder.

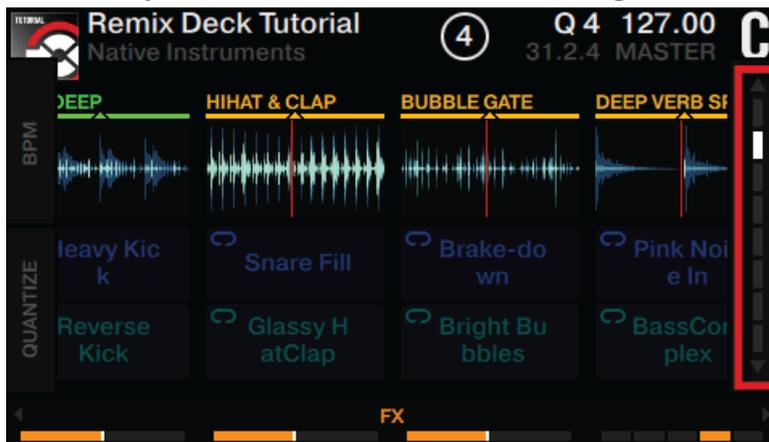


### 3.6.3 Triggering Samples using Different Quantize Sizes


1. Press Display Button 2.



The QUANTIZE window opens in the display.

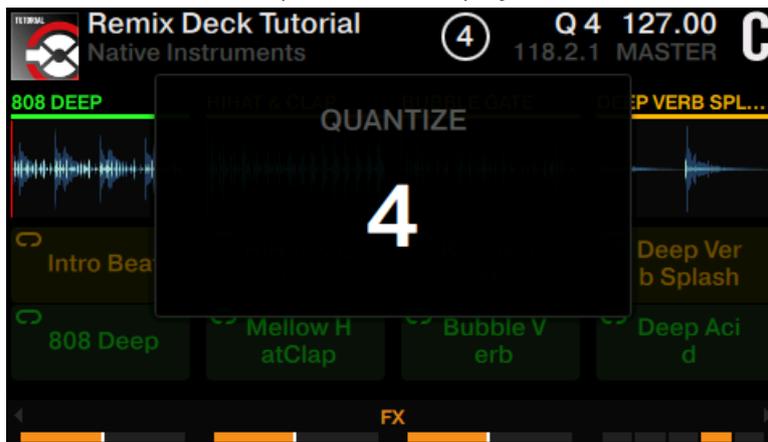

2. Turn the Decks's **BROWSE** encoder to select a quantize value of 16 beats.

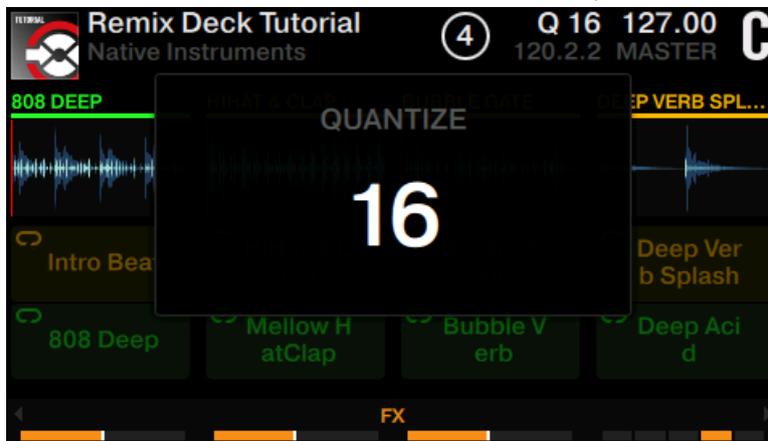

3. Press Display Button 2 again to close the **QUANTIZE** window. The quantize value is visible in the display.



4. Now press the pads to trigger samples.
- After you press a pad, TRAKTOR will play out the currently playing sample to the end of the 16 beats segment and then start playing back the sample assigned to the pad you pressed. If you selected a quantize size of 8 beats, TRAKTOR will finish the currently playing 8 beats segment before playback of the new sample commences.




It's a good idea to experiment with Quantize Values. Depending on the scenario, you will often want to keep the values long (four beats, eight beats, or even longer) to keep your musical phrases synced up. But for rapid changes between sounds, and a more "active" remixing, try for values of one beat or less.

### 3.6.4 Adjusting Levels and using Filters of Remix Slots

You can adjust the output levels of the Remix Slots to balance out differences in volume or to fade in our fade out samples smoothly:

- ▶ Move the Slot Volume faders slowly upwards or downwards to fade in or fade out samples smoothly.

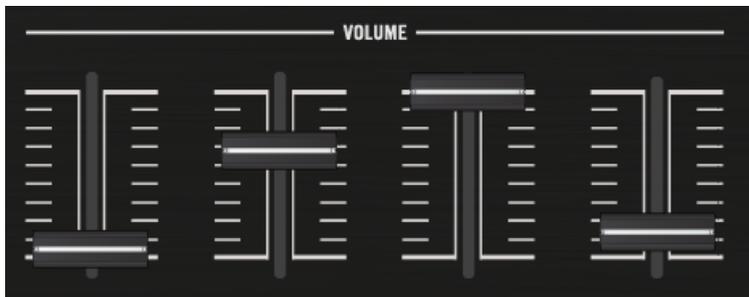

### 3.6.5 Using the Touch Strip on a Remix Deck

In this brief tutorial we'll learn how the Touch Strip can be used with the Remix Deck.

On a Remix Deck which isn't playing a track:

- ▶ Swipe on the Touch Strip to move the playhead positions within the active Samples. Swiping toward the right will move the Remix Slot playhead position in the current Remix Deck row backward; swiping toward the left will move the Remix Slot playhead position forward.



Just like Track Decks the Remix Decks can become out-of-phase at times, even when they have their corresponding **SYNC** button engaged. The Touch Strip provides you with immediate visual feedback (via its LEDs) to allow you to make necessary adjustments.



You cannot use the Touch Strip for seeking functions on a Remix Deck.

On a Remix Deck which isn't playing a track:

- ▶ Swipe along the Touch Strip to tempo bend.
- ▶ Hold the **SHIFT** button, and swipe from right to left to backspin the Samples.
- ▶ Hold the **SHIFT** button, and hold your finger on the Touch Strip to hold the Samples.

The SHIFT-behavior is always the same on Remix Decks regardless if the option Touch to Scratch is disabled in TRAKTOR's Preferences.

## 3.7 Capturing Samples from Track Decks (Using Remix Mode)

You can create your own Remix Sets by capturing (or sampling) parts of a track playing back on a Track Deck.



Note: in Remix Mode, you can only capture Samples to the current Remix Set page! Select a different Remix Page to save before beginning the capture.



The Capture Source must always be a Track Deck.

### Prerequisites

- The track “Techno 1” is loaded on Deck A and stopped.
- Deck C is set up as an empty Remix Deck.
- All Remix Slot Volume Faders are raised to the top.

### Capturing a Sample and Playback


To capture a Sample of a track on Deck A:

1. Set the focus on Deck A.

2. Hold the **CAPTURE** button. The LED ring around the Loop encoder starts to lit alternating in white and blue.



3. While holding **CAPTURE**, touch the Loop encoder to let the **CAPTURE** window pop-up and turn the Loop encoder to select the capture Source "DECK A".

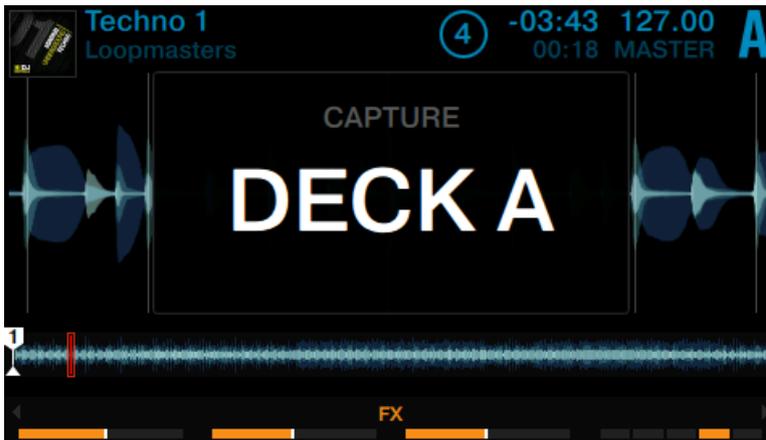


4. Release the Loop encoder to close the **CAPTURE** window and release the **CAPTURE** button.

5. Press the **REMIX** button to enable REMIX Mode.



The pads should now be unlit because nothing is loaded into Remix Deck C.

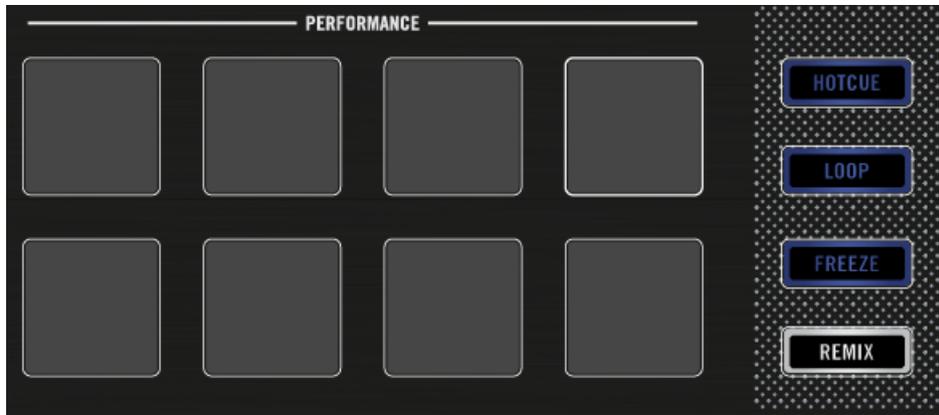

- Press the View button to switch to Split View.



Both Decks A and C are shown in the display.




- Turn the Loop encoder to define the capture size.



- On Deck A press the **PLAY** button to start playback.
- Press one of the unlit pads to capture a Sample from the current playback position.

→ You have captured a Sample of the track.

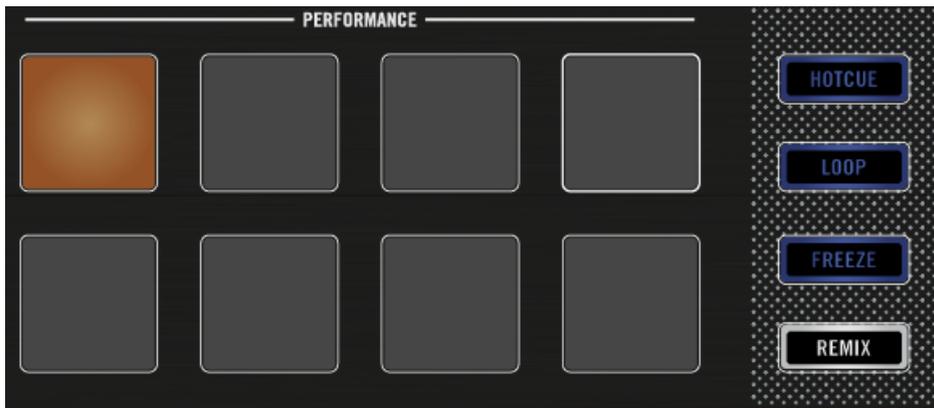

The pad now illuminates a new color and the captured Sample is shown in the display.



### Playback of Captured Samples from a Track Deck

As soon a Sample is captured, you can perform the following actions:

- ▶ Capture further samples from another Capture Source and/or using another Capture size.




The pads now illuminate with new colors and the first four captured samples are shown in the display.



- ▶ Press the illuminated pads to trigger playback. The Samples are now being mixed with the track playing in deck A. The Samples will continue to loop within their Remix Slot.



Move the Slot Volume Faders above the pads to smoothly fade the Sample out or in.

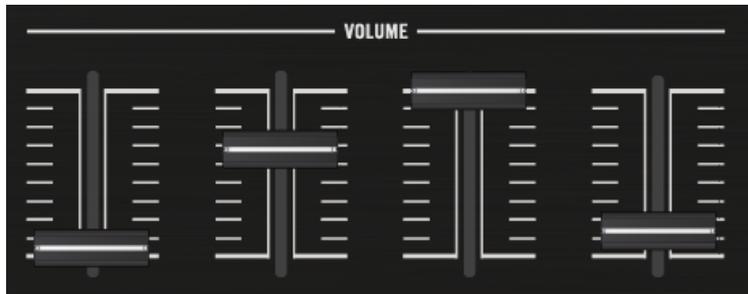

- ▶ Hold the **SHIFT** button and press the illuminated pad to stop playing.



You can save a new Remix Set by clicking on the corresponding Deck letter in the TRAKTOR software and selecting [Save Remix Set](#). Rename the set by clicking on the Deck header where [New Remix Set](#) is displayed. Saved Remix Sets will be added to: [BROWSER>TRACK COLLECTION>ALL REMIXSETS](#).

## 3.8 Adding FX

In this tutorial section, we will walk you through the basics of using the FX Units. By default, TRAKTOR provides you with control over two FX Units, which can be assigned to any of the Decks. You can set up two types of FX: Single FX and Group FX. The following sections will explain both.



With a second TRAKTOR KONTROL D2 controller you can enhance the full potential of TRAKTOR and your mixing abilities due to simultaneous control of all Decks and FX Units.


### 3.8.1 Assigning Decks to the FX Units

The FX Unit at the top of the D2 controls either FX Unit 1 or FX Unit 2 of the TRAKTOR software. This depends on the current Deck control:

- When the Deck control is currently on Decks A and C, the FX Unit controls FX Unit 1 of the TRAKTOR software.
- When the Deck control is currently on Decks B and D, the FX Unit controls FX Unit 2 of the TRAKTOR software.

To assign the Decks A and C to the active FX Unit:

- ▶ Press the FX Assign buttons **A** and **C**. The buttons light up brightly.



To unassign the Decks A and C to the active FX Unit:

- ▶ Press the FX Assign buttons **A** and **C** again.

### 3.8.2 Setting up an FX Unit to Group FX Mode

When an FX Unit is set to Group FX mode, it allows up to three different audio effects to be used simultaneously within an FX Unit. The following section explains how to set up your own **Group FX**, and how to control its three effects via the FX knobs and FX buttons.

#### Prerequisites

- The track "Techno 1" is loaded on Deck A. The track is playing and audible.
- All FX knobs of the FX Unit are set to center position.


#### Setting up the FX Unit to Group FX Mode

To load a Group FX into the FX Unit:


1. Press the **FX SELECT** button of FX Unit at the top left of the D2.




The FX Unit 1 menu opens.

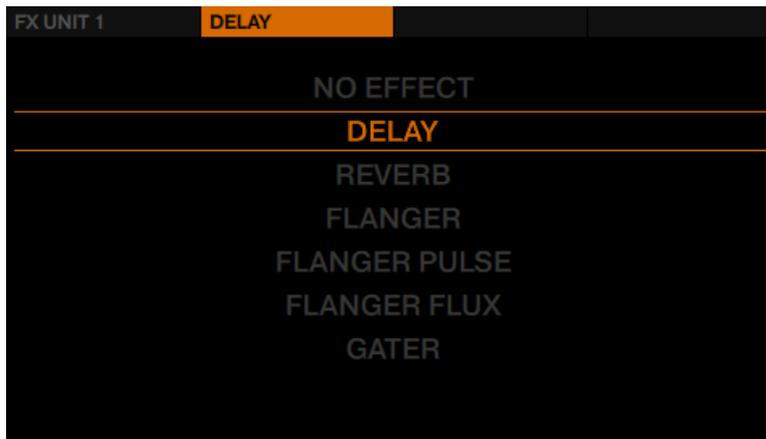

- Press the FX Button 1 to display the FX Unit 1 options.

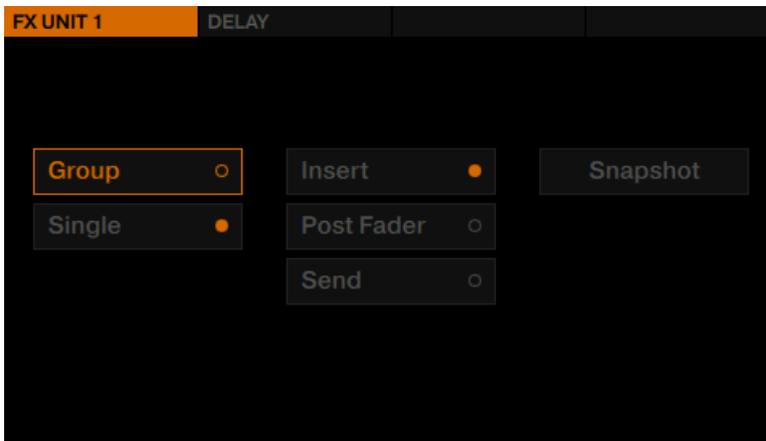

- Turn the **BROWSE** encoder to select **Group**, and press the **BROWSE** encoder to enable Group FX mode. Three default effects are loaded into the Group FX and the FX Unit is set up as **Insert**.

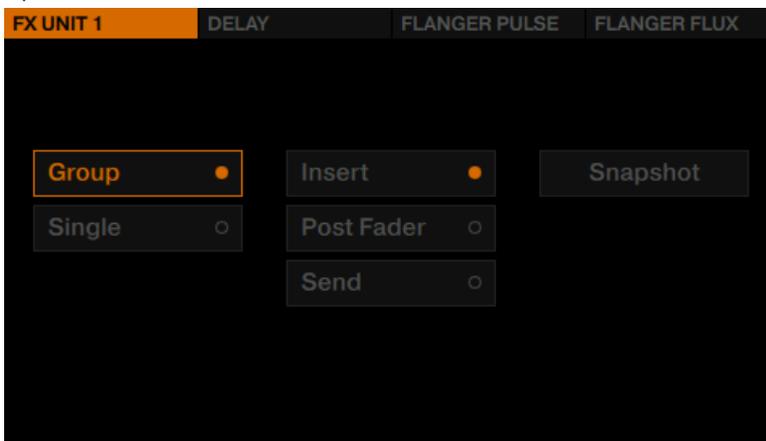

- Press the **FX SELECT** button again to exit the FX Unit menu.

### Apply the Group FX to the Track

As soon you set up your Group FX, activate the effects slots with the FX buttons and control one parameter of each effect with the FX knobs:



The FX Knobs and FX buttons.

- ▶ As soon you touch any FX knob, the FX panel will drop down in the display.



- ▶ Experiment with the FX Knobs 1 to 4 and listen to the resulting changes. The parameter adjustments are also visible in the FX panel.



- ▶ You can activate/deactivate each effect slot individually by pressing the corresponding FX buttons 2 to 4 below.




### 3.8.3 Exchanging effects in the Group FX

To exchange any of the effects slots in a Group FX setup:

1. Press the **FX SELECT** button of FX Unit at the top left corner of the D2 to open the FX Unit menu.



2. In the FX Unit menu, press FX Button 3 to exchange the effect in effects slot 2. An overview of available FX will be displayed.

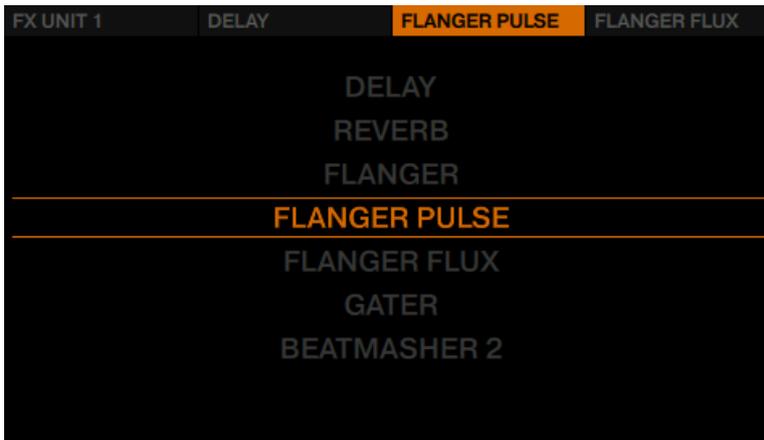

3. Turn the **BROWSE** encoder to select the Gater effect and press the **BROWSE** encoder to load it.



→ You have exchanged effects slot 2 in the Group FX. Repeat this process for any of the remaining effects in the Group FX.



### 3.8.4 Setting up an FX Unit in Single FX Mode

While a Group FX setup gives you control over up to three effects with one parameter each, setting an FX unit to Single mode provides access to three parameters of a single effect.

We will set up FX Unit 2 in Single FX mode and load a Delay effect:

#### Prerequisites


- The D2 controls the right Decks B and D so that the FX Unit of the D2 controls FX Unit 2 of the TRAKTOR software.
- The track "Techno 2" is loaded into Deck B. The track is playing and audible.

To load a Single FX to FX Unit 2:


1. Press the **FX SELECT** button in the top right of the D2.



FX Unit 2's setup menu opens in the display.

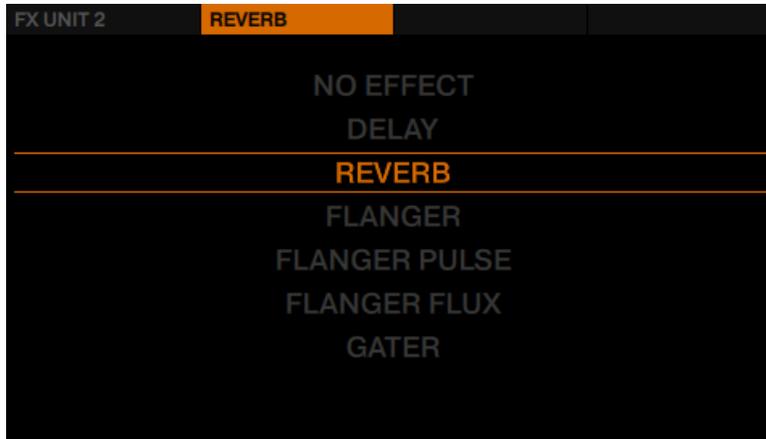


2. Press FX Button 1 to display the FX Unit 2 options.
3. Ensure the options *Single* and *Insert* are selected.

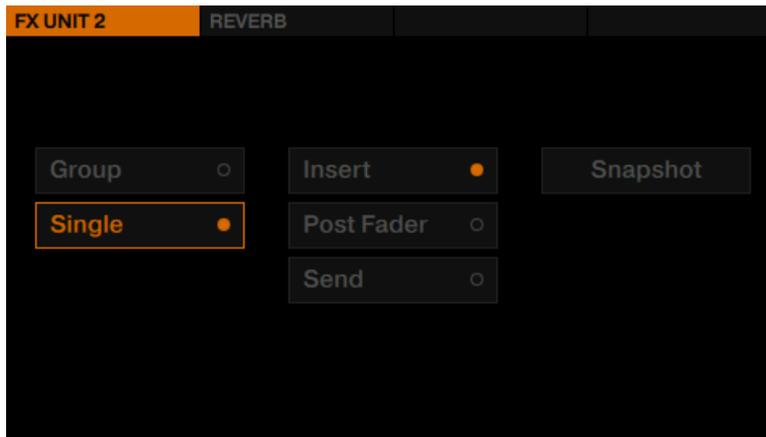

4. Press FX Button 2 to display the list with available FX.

- Turn the **BROWSE** encoder to select Delay, and press the **BROWSE** encoder to assign the FX. The FX Unit 2 menu closes.

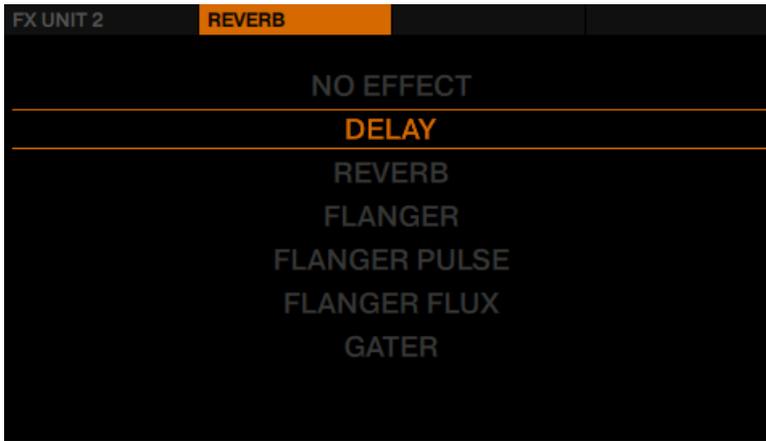

- Press FX button 1 to activate the Delay. You will hear a delayed signal being added to the playing track.



With the Delay enabled, you can perform the following actions:

- ▶ Turn FX Knob 1 clockwise. The Delay effect gets louder. The mix value in the FX drop-down panel in the display increases.



- ▶ Turn FX Knob 1 counter-clockwise. The Delay effect gets quieter. The mix value in the FX drop-down panel in the display decreases.



- ▶ Turn the FX knobs 2-4 to adjust FILTER, FEEDBACK and RATE values of the Delay effect.



- ▶ Press FX button 3 to use the freeze feature (FRZ) of the Delay effect. Your track is muted and the Delay effect starts to decay. Press FX button 3 again to re-engage the track going into the Delay effect.



- ▶ Press FX button 4 to activate spread (SPR) for a wider Delay sound.



- ▶ Press FX button 2 to reset the FX parameters to their default values.




This resets the FX parameters in the software independently from the FX knobs position on the hardware.

### 3.8.5 Storing a Snapshot

You can save a default state for any of the effects by doing the following:

1. Adjust the FX knobs and buttons to your liking.
2. Press the FX button 1 to display the FX Unit's options.

- Turn the **BROWSE** encoder to select **Snapshot**.

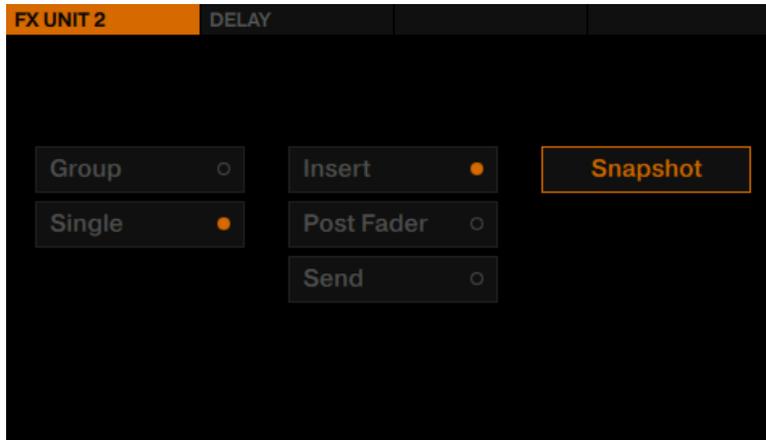

- Press the **BROWSE** encoder to save the Snapshot.  
→ The next time you press FX Button 1 with this effect loaded, its parameters will assume the values you stored.

### 3.8.6 Routing FX

TRAKTOR's effects are insert effects by default, but you can also use them as post fader effects or as send effects.

- ▶ To change FX Routing, either select **Insert**, **Post Fader**, or **Send** in the FX Unit's options.

## 3.9 Using Performance Modes on Remix Decks

The D2's Remix Deck provide you with Performance Modes, allowing you to send individual Remix Slot channels to be processed by an effect/s. The Performance Modes are available for Remix Decks only. By default the Performance Mode Filter is applied to the Performance Controls below the display.




### Prerequisites

- The Remix Set "Remix Set Tutorial" is loaded to Remix Deck C.
- FX Unit 2 is set to Single Mode and has the Reverb FX loaded.
- FX Unit 2 is assigned to Deck C.


### 3.9.1 Selecting and applying a Performance Mode

To select the FX SEND Performance Mode on Deck C:

1. Set the Deck focus to Deck C.
2. Press pads 2, 3 and 4 to trigger samples.
3. Press the left Performance Mode button until the Display reads FX SEND just above the Performance controls.

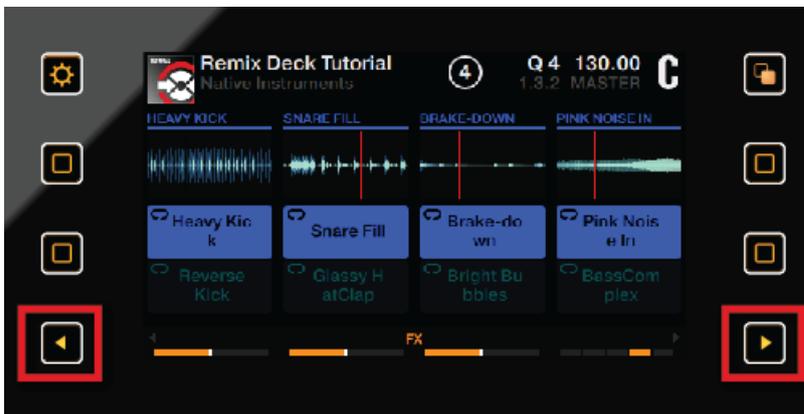

- Press the **ON** buttons to activate/deactivate the FX SEND per Remix Slot. Turn the Performance knobs to control the mix between unprocessed and effect signals.

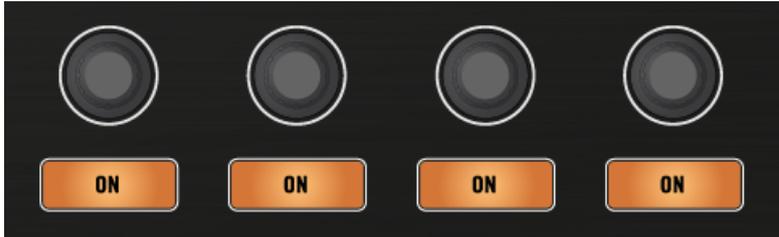

You can have all Performance Modes enabled simultaneously. Skip through the Performance Modes to check which modes are active.

### 3.9.2 Using Performance Mode Pitch

When Performance Mode Pitch is enabled:

- Touch a Performance knob to expand the **PITCH** parameters overview in the display.



- Turn a Performance knob clockwise to pitch up or counterclockwise to pitch down the samples individually.



- You will hear the result in the audio and see the values change in the PITCH parameters overview.

### 3.9.3 Using Performance Mode Filter

When Performance Mode Filter is enabled:

- Touch a Performance knob to enlarge the FILTER parameters overview in the display.



- Turn a Performance knob clockwise to apply hi-pass filtering to the playing Sample. Turn a Performance knob counterclockwise to apply the low-pass filter to the playing Samples individually.



- You will hear the result in the audio and see the values change in the FILTER parameters overview.

### 3.9.4 Using Performance Mode FX SEND

The Performance Mode FX SEND allows you to send signal from each Remix slot to the assigned FX Unit/s. In this case, Deck C is assigned to FX Unit 2, which is set up as a Reverb. As soon as the **ON** Buttons are enabled in this Performance Mode, the audio effect from FX Unit 2 should become audible.

When Performance Mode FX SEND is enabled:

1. Touch a Performance knob to expand the FX SEND parameters overview in the display.



2. Turn the Performance knobs clockwise to increase or counterclockwise to decrease the FX SEND amount.



- You can hear a Reverb effect being added to the Remix Slots. Slot 1's value of 25% means that you're listening to a mix of 75% unprocessed signal and 25% Reverb.

## 3.10 Working with Beatgrids

TRAKTOR recognizes a track's BPM precisely and sets the Beatgrid. Some tracks, however, need manual correction e.g. a track with a complex rhythm or with uneven timing, coming from a tape machine or warped vinyl, and the D2 provides you with the controls to do this.


### 3.10.1 Checking a Beatgrid

To guarantee that all Tempo, Loop and Move controls work as expected, you will have to verify the Beatgrid for your tracks:

1. Load a track into a Track Deck. The Track will be analyzed.




- Press Display Button 3 to zoom into the waveform and get a more precise view.

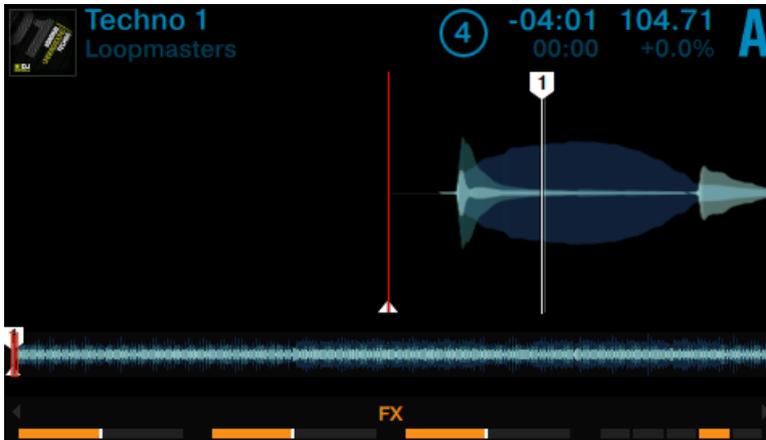

- Check the **Beatmarker** at the beginning of the track.

→ In this example, you can see the Beatmarker isn't aligned with the very beginning of the waveform. As a result, the track will not sync with others.

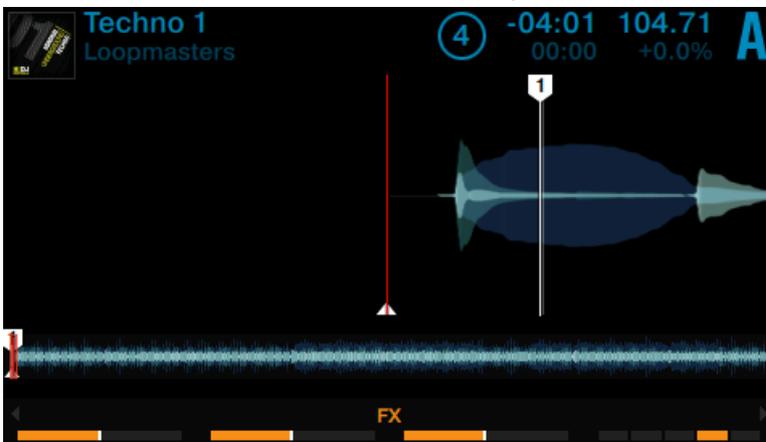

In the following section you will learn how to fix a misaligned Beatgrid manually.

### 3.10.2 Correcting a Beatgrid Manually

If a track is not correctly aligned to the beat, use Beatgrid mode to fix it. The following section will explain the required steps.

#### Enabling the Beatgrid Mode

To enable the Beatgrid mode:

1. Press the **EDIT** button.



The Beatgrid mode opens in the display. A four beat loop at the current playback position is displayed.



2. Press the Deck's **PLAY** button to trigger playback of the track.

On the display, you'll see a four beat loop, based on the detected BPM value, which serves as a reference for manual Beatgrid adjustments. While playing back the track, a white position pointer cycles through, indicating the relative sync position within the loop. In the background, the entire track is played back and the red playhead travels across the waveform displayed below the loop.

## Beatgrid Interactions

While the track is playing with Beatgrid Mode enabled:

- ▶ Rotate Performance knob 1 (OFFSET) to shift the entire waveform underneath the Beatgrid. Align the first Beatmarker with the first peak in the loop's waveform.
- ▶ Rotate Performance knob 2 (BPM) to correct the detected BPM value in coarse steps. Try to align the second, third and fourth beat (in most cases indicated by the biggest peaks in the waveform) with the second, third and fourth Beatmarker.



- ▶ Rotate Performance knob 3 (FINE) to fine-adjust the BPM value.



- ▶ Press **SHIFT** and turn Performance knob 2 (BPM) to double or halve the current BPM value.
- ▶ Rotate Performance knob 4 (SCAN) to scroll through the track. Check if the Beatgrid stays aligned over the course of the track.


### Position Aware Beatgrid Tempo Adjustment

Performance knobs 3 and 4 (BPM) are scaled based on the viewing position of Beatgrid mode so that adjustments made far away from the Beatmarker don't result in abrupt changes to the waveform position. For example, if you are near the Beatmarker at the start of a track and change the tempo of the Beatgrid, you will see the waveform move under the Beatgrid by a particular amount. If you then scan later into the track, adjusting the tempo will create a similar amount of motion on the waveform (rather than a large amount of motion) thus allowing for precise setting of the Beatgrid tempo over the length of the track.

### Beatgrid Zoom Mode

To set the position of the Beatgrid with greater precision you can use the Beatgrid Zoom Mode:

1. Press the **ON** button 1 to zoom in the first beat.

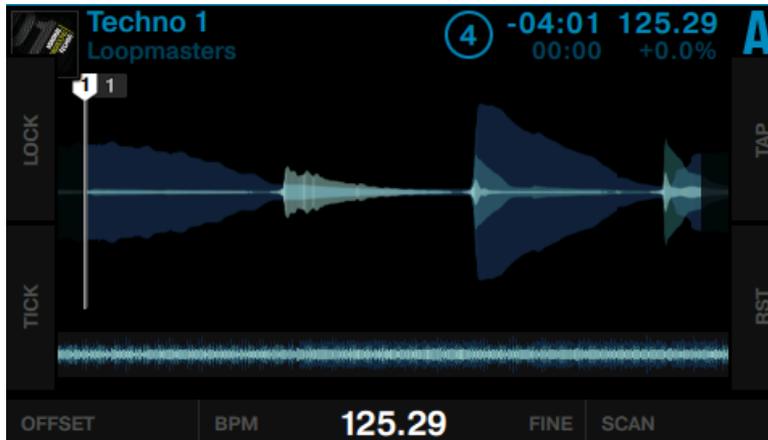

2. Rotate Performance knob 3 and 4 to adjust the Beatgrid.
3. Press the **ON** button 1 again to exit Beatgrid Edit Zoom Mode.

### 3.10.3 Additional Help Actions

#### Tap the Tempo

Tap allows you to manually set the tempo by tapping along the playing track:

- ▶ Press Display Button 3 (TAP) four times in sync with the playback.



→ The tempo is calculated and the Beatgrid adapts to the tempo.

### Tick (Audible Beatgrid)

The Tick works like a metronome, giving you an audible pulse for every beat. Align the Tick and the beats in your track for perfect sync.



You can only hear the Tick on the CUE (headphones), not the MAIN (audience).

- ▶ Press Display Button 2 to enable Tick.



→ The beat tick will then be audible in your headphones when cued.

### Reset your edits

If your edits do not produce the desired result, you can undo your edits:

- ▶ Press Display Button 4 (RST).



→ This will reset your edits to the auto-detected values.

## Lock the Beatgrid

Once the Beatgrid is correctly aligned with the beat throughout the whole track:

- ▶ Press Display Button 1 (LOCK).



→ All buttons in the Beatgrid panel are deactivated.

The stored tempo (BPM) is locked and cannot be changed until you unlock it by clicking **LOCK** again. All tracks with a locked Beatgrid will show a small **Lock** icon within the Browser.

## **4 Hardware Reference**

This chapter details the interface elements on your D2 and explains how they interact with the TRAKTOR software. This includes an overview of the main areas of the user interface, as well as a full reference for every button, knob, fader, and the color display.

### **4.1 Overview of the Controller**

This section provides you with an overview of the different areas of the controller's interface.



Sections on D2's Top side


The top view of the TRAKTOR KONTROL D2 is divided into two main areas listed in the table below: The table also provides the links referring to the section with more information.

Callout	Description	Links leading to section with further information
(1)	<b>The Deck</b>	<a href="#">↑4.2, The Deck</a>
(2)	<b>The FX Unit</b>	<a href="#">↑4.3, The FX Unit</a>

## 4.2 The Deck

D2 features a Deck section that gives you hardware control over the software Decks in the TRAKTOR software. Active TRAKTOR Decks always work in one of the Deck modes, as either Track Deck, Remix Deck or Live Input.

The following image and table give a detailed overview of the Deck's Elements and links referring to sections with further information.

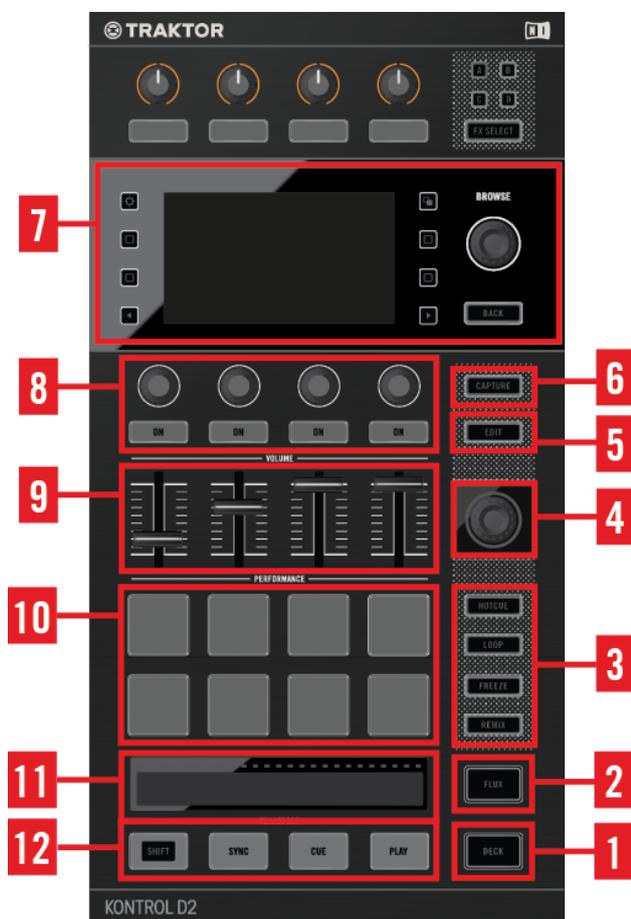


The Deck unit's interface elements

Callout	Description	Link to section providing further information
(1)	<b>DECK button</b>	<a href="#">↑4.2.1, DECK Button</a>
(2)	<b>FLUX button</b>	<a href="#">↑4.2.2, FLUX Button</a>
(3)	<b>Mode Select buttons</b>	<a href="#">↑4.2.3, Mode Select Buttons</a>
(4)	<b>Loop Encoder</b>	<a href="#">↑4.2.4, Loop Encoder</a>
(5)	<b>EDIT button</b>	<a href="#">↑4.2.5, EDIT Button</a>

Callout	Description	Link to section providing further information
(6)	<b>CAPTURE button</b>	<a href="#">↑4.2.6, CAPTURE Button</a>
(7)	<b>Display and BROWSE controls</b>	<a href="#">↑4.2.7, Display Area and Controls</a>
(8)	<b>Performance controls</b>	<a href="#">↑4.2.8, Performance Controls</a>
(9)	<b>Slot Volume faders</b>	<a href="#">↑4.2.9, Slot Volume Faders</a>
(10)	<b>Pads</b>	<a href="#">↑4.2.10, Pads</a>
(11)	<b>Touch Strip</b>	<a href="#">↑4.2.11, Touch Strip</a>
(12)	<b>TRANSPORT controls</b>	<a href="#">↑4.2.12, Transport Controls</a>

### 4.2.1 DECK Button

The **DECK** Button allows you to switch the focus (and controls) between the primary and secondary Decks in a Deck section.




DECK Button

The **DECK** button lights blue when a primary Deck (A or B) is focused and white when the secondary Deck (C or D) is focused.

### 4.2.2 FLUX Button

Press D2's **FLUX** button to enable **Flux Mode** for the focused Deck.



FLUX Button

In Flux mode, for every Deck, a second playhead continues playing the track, even if you loop a section, temporarily jump back to a cue point, skip forward or backward, etc. That way, the track keeps progressing, no matter what you do.

### 4.2.3 Mode Select Buttons

Below the Slot Volume Faders, D2 features 8 pads per Deck which function either as Remix Pads, as loop marker triggers or as cue marker triggers, depending on which of the four modes you select via the Mode Select buttons:



Mode Select Buttons

#### General Behavior of Mode Select Buttons:

- The default mode for a Track Deck is Hotcue.
- The default mode for a Remix Deck is Remix.
- Remix mode is exclusive to Remix Decks.
- Hotcue isn't available for Remix Decks.

#### 4.2.3.1 HOTCUE Button

**Hotcue** is the default mode for Track Decks. While in Hotcue mode, the pads store and trigger CUE markers in a track while it's playing. This mode is disabled automatically when you switch focus to a Remix Deck.



HOTCUE Button


### 4.2.3.2 LOOP Button

The **LOOP** button activates LOOP mode.



LOOP Button

When **Loop** mode is activated, the first row of pads turns green, and the second row turns orange.

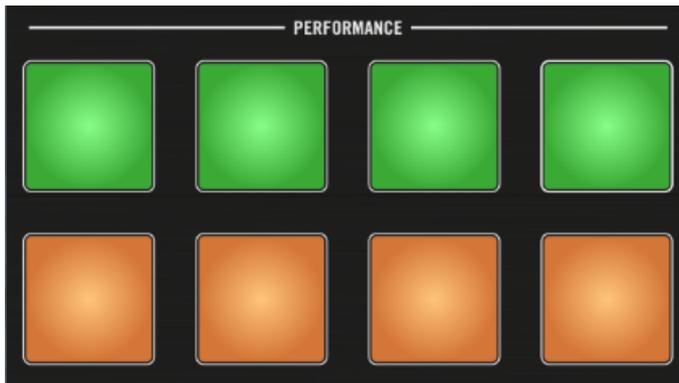

Pads in Loop Mode

## Looping

- The first row of pads (green) allow you to loop part of a track. By default the pads are assigned common loop sizes 1/8 of a beat, 1/4 of a beat, 1/2 of a beat, 1 beat.



You can change the loop sizes in TRAKTOR's D2 Preferences:  
*Preferences > Traktor Kontrol D2 > Loop Mode Sizes > Loop*  
For more information, see the TRAKTOR manual.

- If Quantize is activated, TRAKTOR will loop from the next beat.
- If Quantize is deactivated, looping starts immediately when you press the pad.



The behavior of the pads changes when you activate FLUX mode. While FLUX is deactivated, the loop will play back until you press that pad again. With FLUX activated, looping stops as soon as you release the pad.

## Beatjump

The second row of pads (orange) allow you to jump backward and forward in a track in predefined steps, in sync with the track's tempo. By default, the step sizes are:

- Jump back 1 loop size (set per Deck).
- Jump back 1 beat.
- Jump forward 1 beat.
- Jump forward 1 loop size (set per Deck).



Beatjump sizes can be changed in TRAKTOR's software preferences: *Preferences>TRAKTOR KONTROL D2>Loop Mode Sizes>Beatjump*.

- If Quantize is activated, TRAKTOR waits for the next beat before jumping.
- If Quantize is deactivated, TRAKTOR jumps immediately after pressing the pad.

### 4.2.3.3 FREEZE Button

The **FREEZE** button enables the Freeze mode.




FREEZE Button

## Freeze Mode

**Freeze** mode takes the playhead position, adds the number of bars set as loop size and splits this section of a track into eight equally sized slices. These are then mapped to the adjacent pads, which light up blue. Press any of these pads to trigger playback from the mapped slice. Playback continues to the end of the track until you release the pad.

In Freeze mode, the numbers 1 - 8 are overlaid on the waveform to indicate the location of the slices. The first row triggers slices 1 - 4, the second row triggers slices 5 - 8.

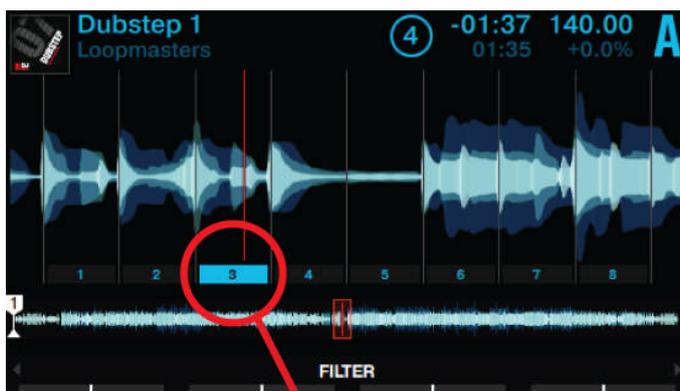

Freeze Mode Overlay

- ▶ Adjust the size of the Freeze slices by pressing and holding the **FREEZE** button and then turning the Loop encoder. The waveform in the display adjusts its zoom level accordingly.



You can vary slice sizes between 1/4 beat and 4 beats.

## Slicer Mode

The **Slicer Mode** extends the Freeze mode's functionality. Press the **LOOP** button while in Freeze mode and the playback behavior of the pads changes: Instead of playing from the slice start to the end of the entire track, pressing and holding a pad in Slicer Mode will play back just the corresponding slice in a loop.



In Slicer Mode, the pads turn green and while playing back the selected loop, pads flash bright green while the assigned slice is played back. This is also reflected on the Deck's display.

### 4.2.3.4 REMIX Button

Remix mode allows you to capture portions of a track from the capture source and assign them to one of the pads.



REMIX Button

Remix mode is the default for Remix Decks, and isn't available for Track Decks. If a Track Deck is in focus, the **REMIX** button is deactivated for that Deck.



If the Deck you set as capture source is empty, D2's display shows *Error while copying* in the Deck header.

For more detailed information on capturing samples, refer to section [↑4.2.6, CAPTURE Button](#).

## 4.2.4 Loop Encoder

The Loop encoder is dedicated to looping functions on either Track Decks or Remix Decks. It has a press function to engage a loop, a rotate function to adjust the loop size, as well as a segmented LED ring indicating that a loop is engaged.



Loop Encoder



You cannot permanently engage a loop when the **FLUX** button is active. The loop only remains active for as long as you hold the Loop encoder and turns off again when released. Adjustments to loop size can be made whether a loop is active or not.

## Moving the Playhead

When a loop is inactive, the Loop encoder can also be used for moving the playhead in increments of the Loop size by holding **SHIFT** and then turning the loop encoder.

### 4.2.5 EDIT Button

Pressing the **EDIT** button lets you adjust a track's **Beat Grid**. The TRAKTOR software can analyze your music and apply a Beat Grid which allows automatic beat-matching and synchronization.



EDIT Button

In most cases (through its **Analyze** function), TRAKTOR recognizes a track's **BPM** precisely and sets the Beat Grid. Some tracks, however, need manual correction (e.g. a track with a complex rhythm or with uneven timing, coming from a tape machine or warped LP), and the D2 provides you with the controls to do this. Please read chapter [↑3.10, Working with Beatgrids](#) for more information.



The **EDIT** button is disabled when a Remix Deck is focused. Beat Grid editing only applies to Track Decks.

## 4.2.6 CAPTURE Button

Pressing the CAPTURE button allows you to quickly select the capture source for a Remix Deck.



CAPTURE Button


The capture Source can be selected by holding the **CAPTURE** button and turning the **BROWSE** encoder. Pressing a pad will then sample content from the Deck set as **Capture** source to the corresponding Remix Cell.



The capture size is determined by the source Deck's loop size setting.

## 4.2.7 Display Area and Controls

On the D2's graphic color display, some functionality is dynamically shown or hidden by means of the Display buttons adjacent to the display. The following image and table give a detailed overview of the Display area and controls and provide links referring to sections with further information.

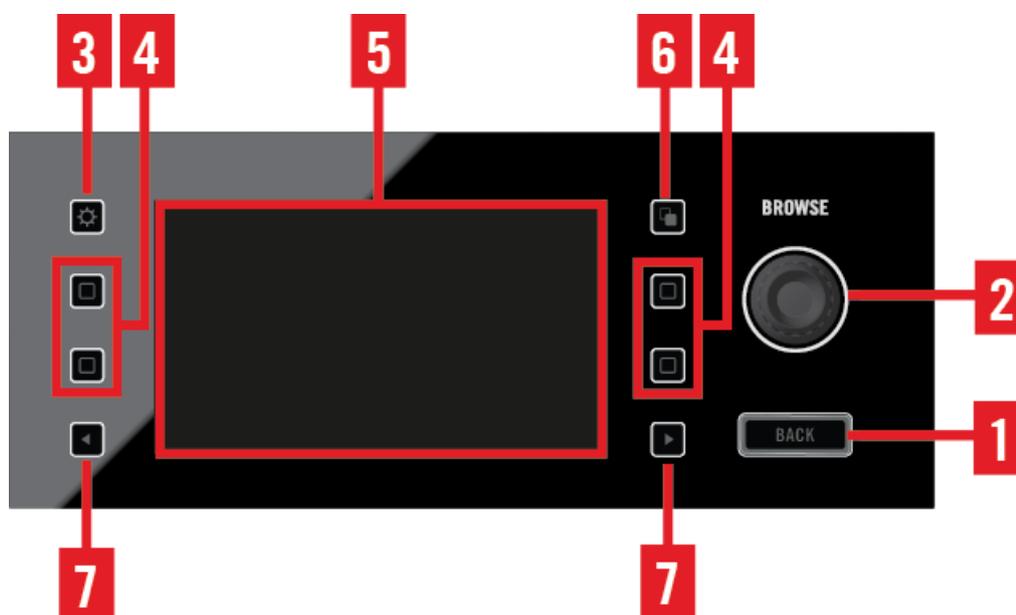

Display Area and Controls

Callout	Description	Links leading to section with further information
(1)	<b>BACK Button</b>	<a href="#">↑4.2.7.1, BACK Button</a>
(2)	<b>BROWSE Encoder</b>	<a href="#">↑4.2.7.2, BROWSE Encoder</a>
(3)	<b>Settings Button</b>	<a href="#">↑4.2.7.3, Settings Button</a>
(4)	<b>Display Buttons</b>	<a href="#">↑4.2.7.4, Display Buttons</a>
(5)	<b>Display</b>	<a href="#">↑4.2.7.5, Display</a>
(6)	<b>View Button</b>	<a href="#">↑4.2.7.6, View Button</a>
(7)	<b>Performance Mode Buttons</b>	<a href="#">↑4.2.7.7, Performance Mode Button</a>

### 4.2.7.1 BACK Button

When the Browser is opened, pressing the **BACK** button lets you navigate a level up in the folder structure, up to the Browser's top level. Pressing the **BACK** button for longer than a second lets you exit the Browser.



BACK Button

### 4.2.7.2 BROWSE Encoder

The **BROWSE** encoder lets you access the **Browser** and navigate through your track collection and playlists.



BROWSE Encoder and BACK Button

- Pressing the **BROWSE** encoder lets you open the Browser in the display.
- Turning the **BROWSE** encoder lets you scroll through the list items. Pressing it again enters a sub folder and again loads an item.

Besides browsing, you can use the **BROWSE** encoder to adjust the BPM and KEY parameters in the respective pop-ups and to select effects in the FX Unit configuration screen.



You can configure the Browse encoder to open the Browser on touch. To do so, activate the [Auto Open Browser on Touch](#) option in TRAKTOR's *Traktor Kontrol D2* Preferences.

### 4.2.7.3 Settings Button

The Settings button is on the top-left.




Settings Button

- ▶ Press this button to open D2's device settings.

## Display Settings (RGB)

Within the settings, you can adjust the screens' color rendition (saturation of RED, GREEN and BLUE colors), as well as the screen's BRIGHTNESS.

- ▶ Turn the Performance knobs beneath the display to adjust the parameters.

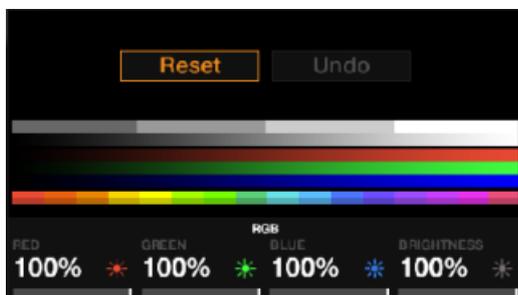


Display Settings View

## Touch Sensitivity Settings (TOUCH)

1. When in the Settings, press Display Button 2 twice to switch to the TOUCH settings.



2. Turn the Performance knobs underneath the display to increase or decrease global touch sensitivity for different kinds of controls: ENCODERS, ENDLESS KNOBS, KNOBS, and FADERS.

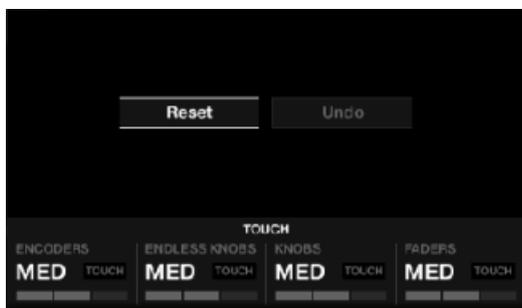

Touch Settings View

#### 4.2.7.4 Display Buttons

These buttons provide different functionality depending on the view you're working in.



Display Buttons



Press any of these buttons to open the pop-up and see each button's functionality

This is an overview of what these buttons do depending on what you see on the display.

### Track Deck View

- (1) **Display Button 1:** Opens the **BPM** pop-up.
- (2) **Display Button 2:** Opens the **KEY** window.
- (3) **Display Button 3:** Zooms into the waveform.
- (4) **Display Button 4:** Zooms out of the waveform.

### Remix Deck View

- (1) **Display Button 1:** Opens the **BPM** pop-up.
- (2) **Display Button 2:** Opens the **QUANTIZE** pop-up.
- (3) **Display Button 3:** Scrolls up in the Sample Grid in steps of two.
- (4) **Display Button 4:** Scrolls down in the Sample Grid in steps of two.



Please note that you can leave any pop-up by pressing the same button again or, alternatively, the View button.


#### 4.2.7.5 Display

Every active TRAKTOR Deck is either a Track Deck, Remix Deck or Live Input Deck. Here's an overview of the information D2's display provide for each of these:

## Track Deck



Track Deck View

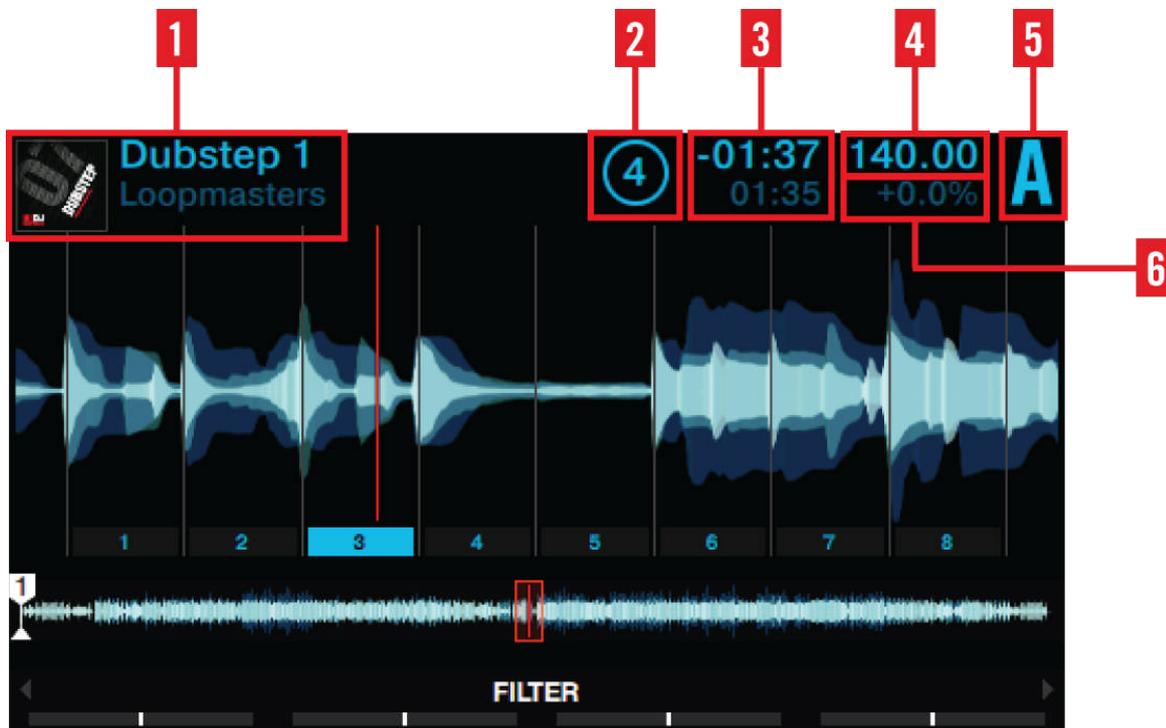

Track Deck View


A Track Deck view on D2 provides information about:

- (1) **Artwork, Song title and Artist name.**
- (2) **Loop size:** From 1/32 - 32 beats.
- (3) **Playhead position:** time played and time remaining.
- (4) **Deck tempo** in BPM.
- (5) **Deck Focus:** Deck A - D.
- (6) **Sync state:** If a Deck is assigned **Tempo Master**, **MASTER** is displayed underneath the BPM value. **SYNC** indicates that the Deck is synchronized to a Tempo Master. If a Deck isn't synchronized at all, the Deck header shows tempo deviation in percent from the file's original tempo.

## Remix Deck



Remix Deck View

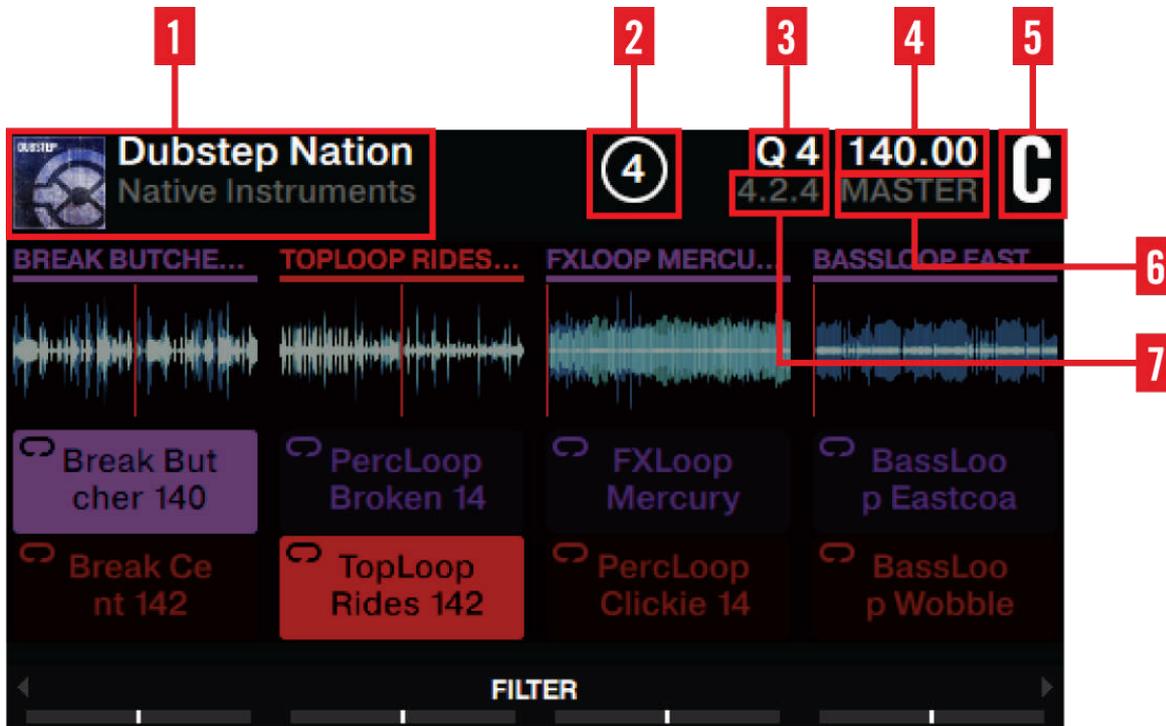

Remix Deck View

A Remix Deck view on D2 provides information about:

- (1) **Artwork graphic, Set title and Artist name.**
- (2) **Loop size:** from 1/32 - 32 beats.
- (3) **Quantize Value.**
- (4) **Deck tempo** in BPM.
- (5) **Deck Focus:** Deck A - D.
- (6) **Sync state:** If a Deck is assigned **Tempo Master**, **MASTER** is displayed underneath the BPM value. **SYNC** indicates that the Deck is synchronized to a Tempo Master. If a Deck isn't synchronized at all, the Deck header shows tempo deviation in percent from the file's original tempo.

(7) **The absolute position on TRAKTOR's timeline** measured in Bars.Beats.Phrases.

#### 4.2.7.6 View Button

The View button is located in the top right corner of the display area.



View Button

It switches between view types:

- **Single View:** Only the focused Deck is displayed.
- **Split View:** Both Decks are displayed; the focused Deck is visualized by a big waveform and detailed information, while the unfocused Deck is reduced to a small waveform, showing markers and a playhead.



Whenever you open a pop-up from a Deck view (e.g. FX Selection Menu, Browser, BPM, or KEY), the View button starts flashing. Press the View button to close the pop-up.

#### 4.2.7.7 Performance Mode Button

The Performance Mode buttons are at the bottom on either side of the display, marked with left and right arrows.




Left Performance Mode Button

- ▶ To cycle through the parameters you can control with the **Performance Controls** (FILTER, PITCH, FX SEND), press one of the buttons repeatedly.

#### 4.2.8 Performance Controls

Underneath the display, the Deck features four encoders and buttons which control either FILTER, PITCH or FX SEND per Slot in a Remix Deck, depending on the selected Performance mode.

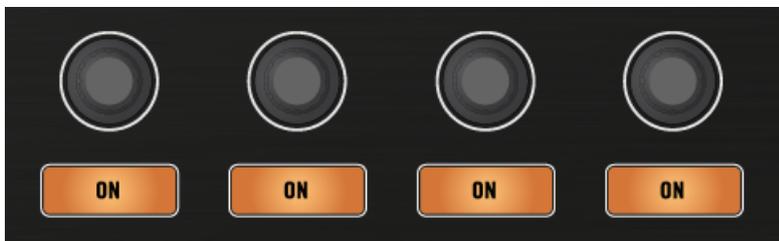

Performance Controls

## Performance Mode FILTER

The default Performance Mode for a Remix Deck is **FILTER**. The Performance **ON** buttons are used to engage/disengage a Remix Slot's **FILTER**. The **FILTER** cutoff is controlled by the corresponding Performance knob. Adjustments to **FILTER** cutoff are shown via the Performance pop-up at the lower end of the displays.



The Performance Controls work even if the Remix Deck isn't focused.

## FX SEND

When **FX SEND** is selected, the knobs control the amount of signal being sent to the assigned FX Unit(s), per Slot. The **FX SEND** amount is displayed right above the corresponding knob.



In case you increase **FX SEND** and still don't hear any effect, please make sure the Remix Deck is actually assigned to an FX Unit in the corresponding Mixer channel.


## PITCH

When **PITCH** is selected, the Performance knobs transpose the pitch of the currently playing sample. In other words: pitch correction is applied per Remix Cell. The amount of pitch change is displayed above the corresponding knob.

### 4.2.9 Slot Volume Faders

D2 offers a separate volume fader per slot. This allows you to mix signals from up to four slots within a single Remix Deck, before it runs through the channel fader and the Crossfader.

- In case only one Deck per side is a Remix Deck, the faders control that Remix Deck's slot volume even if another Deck is focused.
- In case both the primary and secondary Deck are configured as Remix Decks, the Slot Volume faders control the focused Deck's slots.

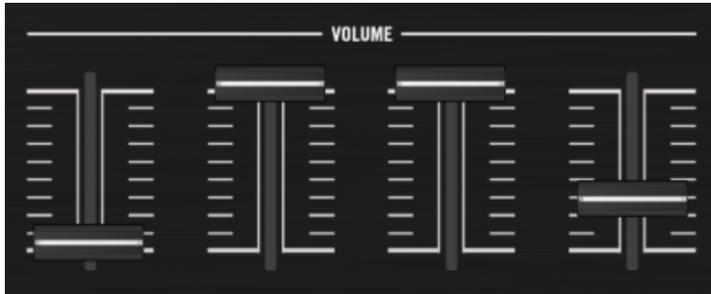

Slot Volume Faders

#### 4.2.10 Pads

The Deck of the D2 comes with a set of 8 pads. Depending on the mode selected via the Mode Select buttons, these pads are assigned different functions.



Pads

Here's an overview of what the pads do in each mode:

## HOTCUE mode

During playback, pressing in an inactive pad sets a cue point. The button lights up and the cue point is automatically assigned to this pad. Pressing that pad again let jump back the playhead to the cue point just defined.

## LOOP mode

In Loop mode, pressing a pad instantly loops playback for the number of bars set as [Loop Mode Size](#) in *Preferences > Traktor Kontrol D2 > Loop Mode Sizes > Loop*. These values are by default:

- 1/8 Bar Loop
- 1/4 Bar Loop
- 1/2 Bar Loop
- 1 Bar Loop

The Loop functionality considers the global Quantize setting:

- If Quantize is active, TRAKTOR delays starting the loop until the next down-beat, making sure looping keeps the track in sync.
- If Quantize is deactivated, looping starts precisely when you press the pad.

## FREEZE and Slicer Mode

In Freeze mode, TRAKTOR takes the playhead position, adds the number of bars set as loop size and splits this section of a track into eight equally sized slices. These are then mapped to the pads. Press a pad to start playback from that slice.

While in Freeze mode, you can access Slicer mode. This is how Slicer mode is different from Freeze mode:

- In Slicer mode, holding a pad will infinitely loop the corresponding slice.
- In Slicer mode, holding two pads will loop the range between the start of one pad and the end of the second.

By pressing the Loop encoder while Freeze mode is this will enable the Slicer mode. The slices in the display and pad color changes from blue to green.

## REMIX Mode

In Remix mode, the pads trigger the content of corresponding Remix Cells - the tracks, loops or Samples defined in the Remix Set. After loading a Remix Set, the pads take on the Sample Cells' color. By pressing Display buttons 3 and 4 you can scroll through the rows of Remix Cells in steps of two.

### 4.2.11 Touch Strip

D2 doesn't feature the conventional Jog Wheel of a regular DJ controller. Functions usually associated with Jog Wheels are instead controlled by the intuitive Touch Strip.

Utilizing the Touch Strip, you can:

- **Seek/navigate:** within the track.
- **Tempo bend (nudge)** for aligning beats.
- **Create a scratch effect**
- **Holding** the track or Samples.
- **Backspinning** the track or the Samples.

Above the Touch Strip, a number of LEDs provide visual feedback for the actions taken on the touch strip.

### Phase Meter

For Track- and Remix Decks, the LEDs work as a **Beat Phase Meter**, showing the focused Deck's beat phase offset from the **MASTER** Deck. This is the same meter as displayed in TRAKTOR's Deck.

### Direction of Scratching

If you didn't learn scratching with LPs and turntables, you may find inverting the Touch Strip's direction more intuitive. If you select this option, swiping to the right on the Touch Strip will move forward in the track's waveform.

- ▶ Inverse the directional response by unchecking the **Invert** checkbox in TRAKTOR's D2 preferences: *Preferences>Traktor Kontrol D2>Touchstrip>Scratch Sensitivity*.



For detailed information on the Touch Strip's preferences, refer to section [↑5.3, Touchstrip](#).

## Direction of Tempo Bending

In TRAKTOR's default setting, swiping your finger on the Touch Strip has a similar effect to speeding up or slowing down an LP with your hand:

- Move to the left to speed up the LP.
- Move to the right to slow down the LP.

If you didn't learn aligning Decks on turntables, this behavior may not make sense to you. Instead, looking at the waveform, you think in terms of moving the playhead position within the track. Also, you want Tempo Bending to be consistent with Seeking:

- Swipe to the right to move the playhead ahead
- Swipe to the left to move the playhead back.

To achieve this, uncheck the [Invert](#) option in: *Preferences>Traktor Kontrol D2>Touchstrip>Bend Sensitivity*.

## Sensitivity

D2 comes with a [Sensitivity](#) setting which should accommodate most users in most situations. You might, however, find that the touch strip doesn't react immediate enough to your input or just the opposite, it may recognize input where there was none intended.

You can adjust the Touchstrip's Bend Sensitivity and Scratch Sensitivity separately in: *Preferences>Traktor Kontrol D2>Touchstrip*.

## 4.2.12 Transport Controls

The Transport buttons control playback of D2's Deck.

### PLAY Button

The **PLAY** button starts/stops the playback of a Deck.



PLAY Button

## CUE Button

The **CUE** button is tied to the Cue Points workflow in TRAKTOR.



CUE Button

The **CUE** button functions as follows:

- If a Deck is playing, press **CUE** to jump to the **Floating Cue Point** and stop playback.
- If a Deck is paused, press **CUE** to set a new **Floating Cue Point** (which replaces the previous one).
- Press **CUE** + **PLAY** and the Deck will keep playing after releasing the buttons.
- Press **SHIFT** + **CUE** to skip back to the beginning of the track.

## SYNC Button

The **SYNC** button activates/deactivates the synchronization of the currently focused Deck to the **Tempo Master** (i.e. the Deck set as the **MASTER** or TRAKTOR's Master Clock).



SYNC Button when in Sync

- ▶ While playing, press **SHIFT** + **SYNC** to set a Deck as the **Tempo Master**.
- The Deck's tempo becomes the tempo reference for all other synced Decks and FX. D2's display shows **MASTER** in the Deck header of the Master Deck.

The **SYNC** button takes on different states to provide visual feedback:

- If the **Deck** is BPM-synced and in phase with the Tempo Master, the button is bright green.
- If the **Deck** is BPM-synced but out of phase with the Tempo Master, the button is bright red.
- If the Deck is unsynced, the button is dim green.

If a focused Deck gets out of phase, you can compensate by:

- ▶ Swiping your finger across the corresponding Touch Strip to re-align the beat phase.
- ▶ Pressing the **SYNC** button twice to snap back into **SYNC** with the Tempo Master.

## SHIFT Button

The **SHIFT** button is a modifier for other control elements on the D2. It allows you to access **secondary functions**, just like the [Cmd] key on your computer keyboard does.



SHIFT Button

- ▶ To access a button's or knob's secondary function, hold **SHIFT** and then use that control element.



You will find examples of using the **SHIFT** button to access secondary functions throughout this document.

## 4.3 The FX Unit

Above the Deck, the D2 features an FX Unit which can be assigned to any of the Decks. Four knobs and buttons allow you to control effects parameters in real time.



The FX Unit of the D2

This is an overview of the naming and function of the FX Unit's key control elements. The knobs in this section are sensitive to touch. Touch any of them to open the FX drop-down menu that provides an overview of the effect(s) loaded along with control assignments and parameter values.


- Single Mode: select one effect; the FX knobs let you control up to 4 parameters.
- Group Mode: select up to three effects as an effects chain; the FX knobs let you control one parameter per effect.

The following table gives a detailed overview of the parameters controlled by FX buttons and FX knobs and it provides links referring to sections with further information.

Name	Function in Single Mode	Function in Group mode
<b>FX Button 1:</b>	Activate/deactivate the entire FX Unit.	-
<b>FX Button 2</b>	Reset all FX parameters to their default value.	Activate/deactivate FX slot 1.
<b>FX Button 3</b>	Depends on the selected effect.	Activate/deactivate FX slot 2.
<b>FX Button 4</b>	Depends on the selected effect.	Activate/deactivate FX slot 3.
<b>FX Knob 1</b>	Adjust the ratio between the unprocessed (dry) signal and processed (wet) signal for the entire FX Unit.	Adjust the ratio between the unprocessed (dry) signal and processed (wet) signal for the entire FX Unit.
<b>FX Knob 2</b>	Controls FX parameter 1.	Control the 1st effect in the FX Unit.
<b>FX Knob 3</b>	Controls FX parameter 2.	Control the 2nd effect in the FX Unit.
<b>FX Knob 4</b>	Controls FX parameter 3.	Control the 3rd effect in the FX Unit.


### 4.3.1 FX SELECT Button

Pressing the **FX SELECT** button let open the FX Settings in the display.



FX SELECT Button

The FX Settings stay open until the **FX SELECT** button is pressed again. When disengaged, the **FX SELECT** button is dim.

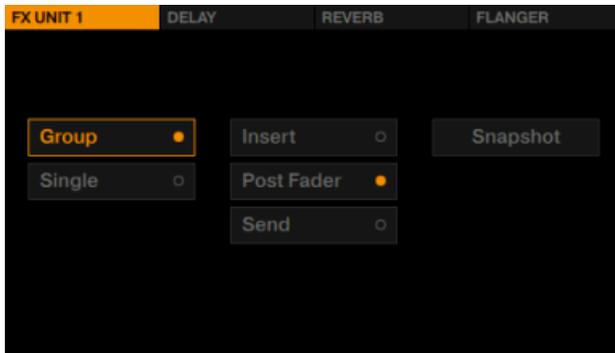

FX Settings of FX Unit 1

The options in these FX Settings determine how you will use the FX Unit.

### 4.3.2 FX Unit Assignment

In order to route a Deck's signal to an FX Unit, press the corresponding FX Assign button in the mixer channel.




FX Assign Buttons

- ▶ In TRAKTOR's default setup with 2 FX Units, press the left FX button to assign the mixer channel to FX Unit 1. Press the right FX button to assign the channel to FX Unit 2. The FX assign buttons light up bright orange when assigned.

## 4.4 The Rear Panel

The rear panel holds the connectors you need to get the D2 running and to connect additional USB equipment such as TRAKTOR controllers.

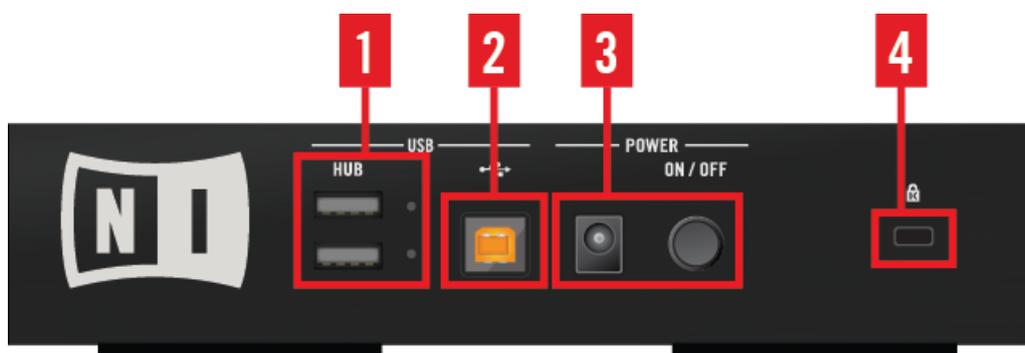


Connections on D2's Rear Panel

Callout	Description	Link to section providing further information
(1)	<b>USB HUB</b>	<a href="#">↑4.4.4, USB Hub</a>
(2)	<b>USB connector</b>	<a href="#">↑4.4.2, USB Connector</a>
(3)	<b>POWER section</b>	<a href="#">↑4.4.3, POWER Section</a>
(4)	<b>Kensington Lock slot</b>	<a href="#">↑4.4.1, Kensington Lock Slot</a>

For technical details about all the connections see chapter [↑7, Technical Specification](#).

### 4.4.1 Kensington Lock Slot



Kensington Lock Slot

Use a Kensington-slot compatible lock to lock your D2 to a heavy object like a table to prevent theft.

### 4.4.2 USB Connector




USB Connector

Connect D2 to your computer here, using the included USB cable. The connection is USB 2, but is compatible to USB 3-equipped computers.



Due to the large amounts of data transmitted to the TRAKTOR KONTROL D2, it may not work properly when connected to a USB hub. Make sure to connect D2 directly to a USB port on your computer if possible.

### 4.4.3 POWER Section

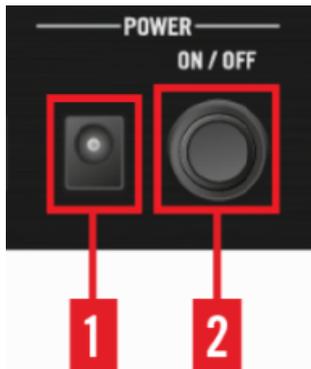

POWER Section

In the **POWER** section, you make the connection to the power supply and to your computer:

- (1) **Power Supply connector (15V - 2.66 A)**: connect the included power supply.
- (2) **ON/OFF switch**: press this switch to turn your device on or off.



Do not use the TRAKTOR KONTROL D2 with a power supply other than the one included in delivery. In case of loss or damage, make sure to purchase a replacement power supply approved by Native Instruments for use with the D2.



Before you use the power supply and connect to the D2, please refer to the TRAKTOR KONTROL D2 IMPORTANT SAFETY INSTRUCTIONS leaflet (included in the box). This leaflet explains how to attach the specific adaptor plug for your region.



Only use the power supply splitter cable to power a second TRAKTOR KONTROL D2 unit. Powering another device may damage your devices.

### 4.4.4 USB Hub

The USB 2 Hub provides additional connectivity for using further equipment such as TRAKTOR controllers and audio interfaces.



USB Hub

## 5 Preferences Pane in TRAKTOR

Once configured via the Setup Wizard, a dedicated pane for D2 is added to TRAKTOR's Preferences window, which lets you configure the behavior of the touch controls, as well as overall LED brightness for the back-lit buttons and the Loop and Beatjump Sizes assigned to each Deck's pads.



The D2 pane in TRAKTOR's Preferences

## 5.1 Restore Default

This button recalls all factory default settings for the TRAKTOR KONTROL D2 and lets you choose its basic deck configuration via the Setup Wizard.

## 5.2 Touch Controls

A number of controls are sensitive to touch. TRAKTOR lets you activate touch functions, which will save you the dedicated press of a button for a few features.

- **Auto Open Browser on Touch:** If activated, touching a **BROWSE** knob will open the Browser, after letting go, it will automatically close. If deactivated, press the **BROWSE** knob to open the Browser.
- **Auto Open FX Panels on Touch:** If activated, touching the **FX** knobs overlays an FX panel with information about the knobs' parameter values, as well as the adjacent **FX** buttons' functions. If deactivated, you can still control the parameters, but no panel is opened.
- **Auto Open Performance Control on Touch:** If activated, touching the Performance knobs below the display overlays a Performance panel with information about the knobs' parameter values, as well as the adjacent Performance buttons' functions. If deactivated, you can still control the parameters, but no panel is opened.

## 5.3 Touchstrip

Touch technology relies on the electrical properties of your skin, which differ from one person to another. The default value will work for most people under most conditions. However, if you feel the touch strips should react more sensitively, or start registering too soon, you can adjust the behavior here.

- **Bend Sensitivity:** by default set to 50%; adjust the Tempo bend sensitivity and check in real time if the change accommodates you better.

- **Scratch Sensitivity:** by default set to 50%; adjust the Scratch sensitivity and check in real time if the change accommodates you better.
- **Bend Invert:** by default deactivated; swiping to the left slows playback down momentarily. If activated, swiping to the left nudges playback forward.
- **Scratch Invert:** by default activated; swiping to the left advances playback position in the track. If deactivated, swiping to the left goes back in a track.
- **Shift + Touch to Scratch:** by default deactivated, holding the **SHIFT** button +swiping within the Touch Strip performs an absolute seek. If activated, holding the **SHIFT** button +swiping within the Touch Strip performs a scratch effect or backspin.

## 5.4 Calibrate

Calibration ensures that each control allows adjustments over their full range and with maximum precision. These settings are precisely calibrated during production, although they might need to be recalibrated over the lifetime of your D2 unit. Recalibration is necessary when a control ceases to allow you to set actual minimum and maximum values.

Calibration is done in groups of control elements, just click the corresponding **Recalibrate** button:

- **FX Knobs:** for recalibrating the FX knobs on both FX Units 1 and 2.
- **Short Faders:** for recalibrating the Slot Volume Faders.

## 5.5 LEDs

The pad and button backlights on the D2 offer two distinct brightness levels to indicate On and Off states. Depending on your light conditions during a performance, it can be necessary to adjust these.

**On State Brightness:** sets the brightness level for engaged buttons and pads.

**Dim State Percentage:** sets the brightness level for inactive buttons and pads.

## 5.6 Loop Mode Sizes

When a Deck is in Loop Mode, the corresponding pads are split into two rows. The top row represents four [Loop](#) sizes, and the bottom row four [Beatjump](#) sizes. Here, you can adjust these settings to suit your needs.


- [Loop](#): For each of the upper four pads, you can select a Loop size of: *1/32, 1/16, 1/4, 1/2, 1, 2, 4, 8, 16, 32* beats via drop-down menus.
- [Beatjump](#): For each of the four lower pads you can select a Beatjump size of: *- LOOP, - 32, - 16, - 8, - 4, - 2, - 1, -1/2, -1/4, -1/8, -1/16, +1/16, +1/8, +1/4, +1/2, +1, +2, +4, +8, + 16, + 32, +LOOP*.

## 5.7 Enable MIDI Controls

The TRAKTOR KONTROL D2 allows you to use the Performance Knobs, Performance Buttons, and the Performance Faders below the Display as MIDI output controls. You can use these controls to send MIDI messages to other software or external equipment. This feature is not enabled by default and requires some configuration.

To enable MIDI Controls for the D2:

1. In the TRAKTOR window click *File*, then *Preferences* to open the preferences window.
2. Navigate to the [Traktor Kontrol D2](#) window. There, check the [Enable MIDI controls](#) preference in the [MIDI Controls](#) section.

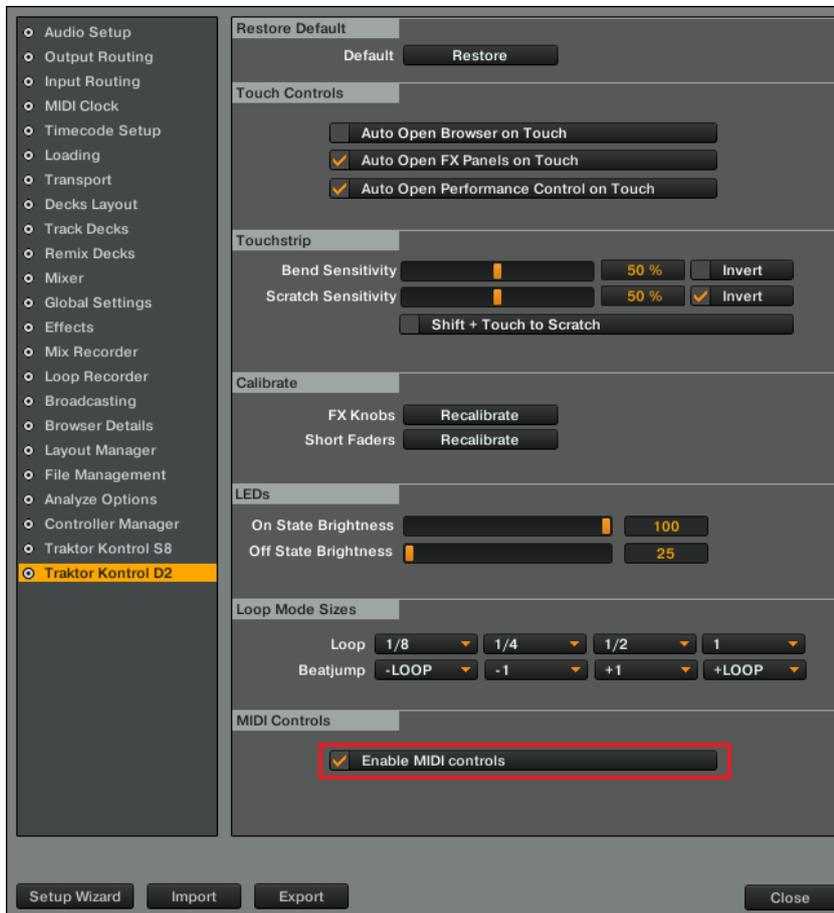

The [Enable MIDI Controls](#) option in the Preferences.

To assign the MIDI message and MIDI channel to the various MIDI controls:

1. Select [Controller Manager](#) tab in the Preferences.


- Click the **Add...** button and select **Generic MIDI** from the list to create a new Generic MIDI Device.




- In the upper-right corner, select the MIDI port to use as the output for this Generic MIDI device.




- Click the [Add Out...](#) button.

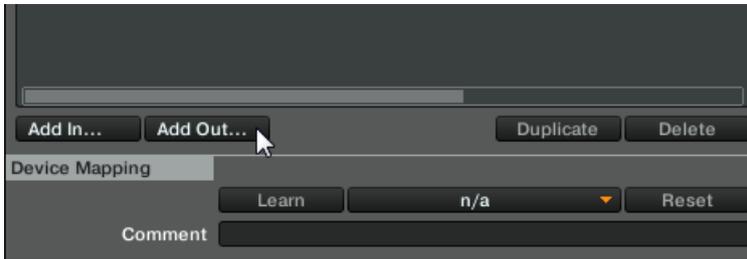

- Navigate to [Global > MIDI Controls >](#).  
Here you can assign the MIDI message and MIDI channel to the various MIDI controls. You will find a list of Knobs, Faders, and Buttons. The first four entries in each category correspond to the left Deck side (assigned to Decks A and C), while the last 4 knobs, faders, and buttons correspond to the right Deck side (assigned to Decks B and D).

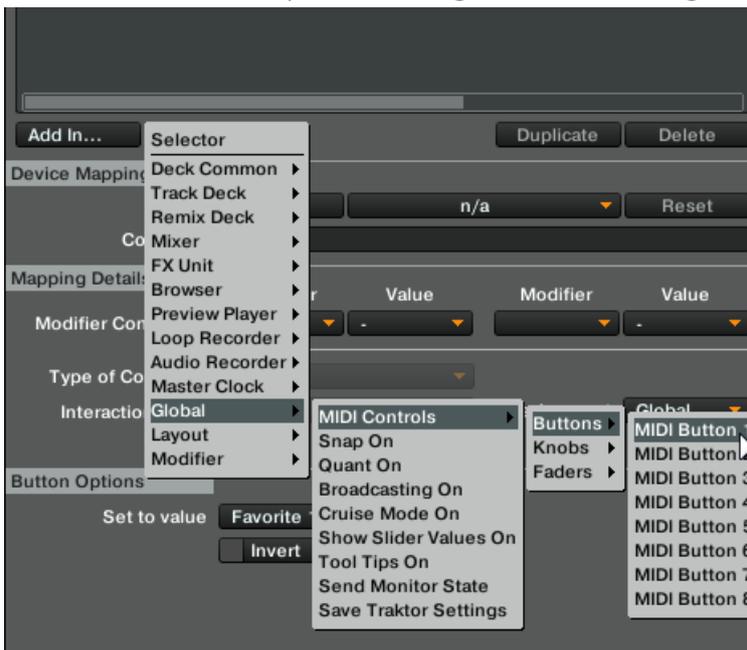

- Select entry to add it to the mapping.

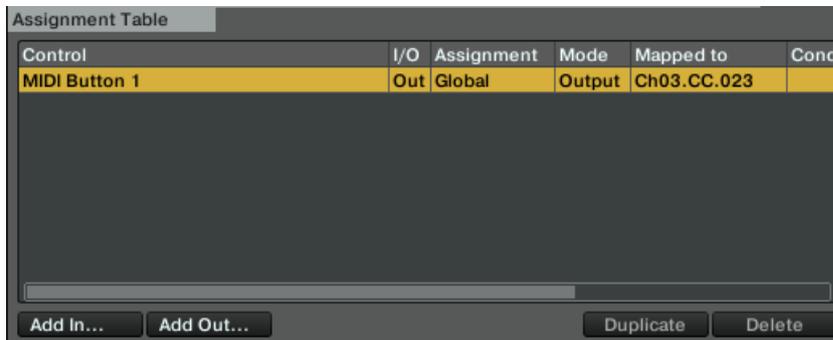


- Click the **Device Mapping** drop-down menu to show a list of 16 MIDI Channels. Hover your mouse over the desired MIDI output channel's entry. A sub-menu holding message types **CC**, **Note**, and **Pitch Bend** will open. You can select **Pitch Bend** to map the MIDI Pitch Bend message to this control, or you can hover your mouse over one of the other two menus to show a list of specific CC and Note numbers and names. You can then click one of these to map the control to the specified Note or CC.




8. Repeat the above two steps for each of the MIDI controls you want to map.
9. Close the Preferences by clicking [Close](#).

To switch the Performance Controls into MIDI Mode on the D2:

- ▶ Press the Performance Mode buttons next to the display until the MIDI page appears.

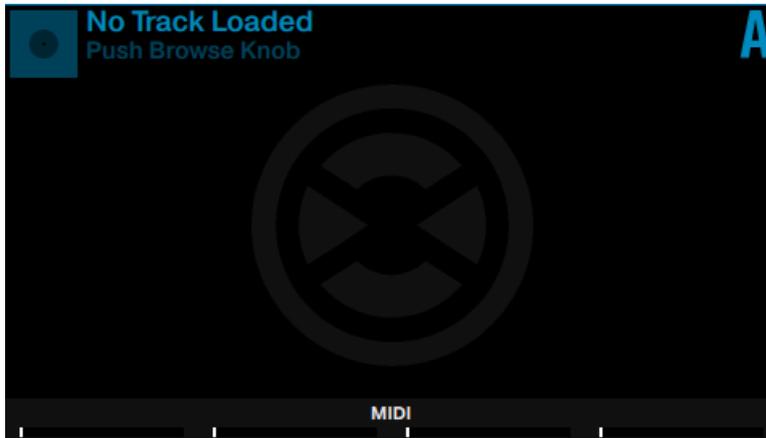

- ▶ Touch a Performance knob to enlarge the MIDI pane displaying current parameters of the selected MIDI controls.

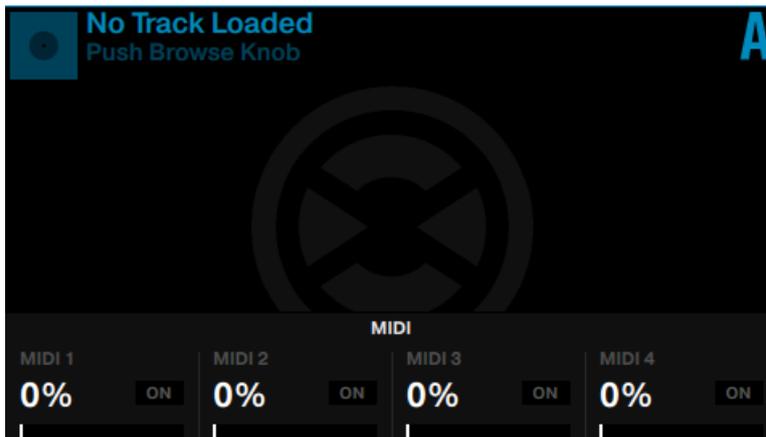



The MIDI page will not appear if the above [Enable MIDI controls](#) preference is not turned on.



When the MIDI mode is enabled on the D2, the Performance Knobs and Buttons will output the MIDI messages that you assigned in the Controller Manager. If you intend to assign the Slot Volume Faders to output MIDI messages, make sure neither of the Decks controlled by the D2 is a REMIX Deck. Otherwise the Slot Volume Faders will still control the Remix Slot volumes instead of outputting MIDI.

## 6 Troubleshooting - Getting Help

This chapter covers the most common issues. Most of what can go wrong when setting up and using TRAKTOR KONTROL D2 should be listed here along with some tried-and-tested ways to solve these issues.

### 6.1 Troubleshooting

There are a few things you should check in case D2 doesn't work with your system.

#### 6.1.1 TRAKTOR Won't Start

- Check the system requirements for TRAKTOR KONTROL D2. Meeting the minimum requirements ensures that TRAKTOR will work, but advanced use (i.e. Keylock, FX) may require a more powerful system.
- Launch the Service Center application and make sure you have the most recent TRAKTOR version installed.
- Make sure that you haven't double-clicked an outdated application alias/shortcut.
- Try to restart your computer. Disconnect any other audio interfaces and computer peripherals like printers, scanners, and the like to see if that solves the problem.
- Try to rename the file **collection.nml** in the TRAKTOR 2 Root folder and restart TRAKTOR. This way, TRAKTOR will create a blank Collection. Re-import the renamed **.nml** file to restore your Collection.

The Root folder is located in:

**Windows:** *|My Documents|Native Instruments|Traktor 2|*

**Mac OS X:** *YourUserFolder/Documents/Native Instruments/Traktor*

#### 6.1.2 TRAKTOR Crashes

In case of a crash during operation, please contact the Native Instruments technical support team and send them your crash log. You will find the crashlog in the following folders:

- **Windows:** *\My Documents\Native Instruments\Traktor 2\Crashlogs\*
- **Mac OS X:** *YourUserFolder/Library/Logs/CrashReporter/*

### 6.1.3 Updates

Whenever you encounter problems, it is recommended that you first download and install any available software updates in Service Center or on our website:

<http://www.native-instruments.com/updates>

Updates are released regularly to fix known problems, maintain compatibility with operating system updates, and to continuously improve the software.

## 6.2 Getting Help

If you are experiencing problems related to your Native Instruments product that the supplied documentation does not cover, there are several ways of getting help!

The links in the following sections are also accessible from the Service Center application:

- ▶ Open the Service Center application and click on the Support button in the upper-right corner.

### 6.2.1 Knowledge Base

The Online Knowledge Base gathers useful information about your Native Instruments product which helps solve issues you may have. You will find the Knowledge Base at:

<http://www.native-instruments.com/knowledge>

### 6.2.2 Technical Support

If no Knowledge Base entry matches your problem, or if the matching entry does not solve the problem, you can use the Online Support Form to contact the Technical Support team of Native Instruments. The Online Support Form will ask you to enter information about your hardware and software setup. This information is essential for our Support team to be able to provide you with quality assistance. You can reach the Online Support via:

---

<http://www.native-instruments.com/suppform>

When communicating with the Native Instruments support team, keep in mind that the more details you can provide about your hardware, your operating system, the version of the software you are running, and the problem you are experiencing, the better they will be able to help you. In your description, you should mention:

- How to reproduce the problem
- What you have already tried to fix the problem
- A description of your setup, including all hardware
- The brand and specifications of your computer
- The software version number



The version number of your software is displayed in the TRAKTOR splash screen you see when the application launches. After startup, the same splash screen can be opened by clicking the TRAKTOR logo in the upper right corner of the user interface.

When installing new software or software updates, a Readme file is included that contains last minute information that was not yet included in the documentation. Please open and read this Readme file before contacting Technical Support.

### 6.2.3 Registration Support

If problems occur during the product activation procedure, please contact our Registration Support team:

<http://www.native-instruments.com/suppform>

### 6.2.4 User Forum

In the Native Instruments User Forum, you can discuss product features directly with other users and with experts moderating the forum. Please be aware that the Technical Support team does not participate in the forum. If you're encountering an issue that can't be solved by other users, contact Native Instruments' Technical Support team via the online support form as described above. Find the User Forum at:

<http://www.native-instruments.com/forum>

---

## 7 Technical Specification

### Connectors

**USB-HUB:** Two USB 2.0 Type A connectos

**K:** One Kensington lock slot

**USB:** One USB 2.0 Type B connector

**POWER:** One power supply connector

### Power Supply

- Input: 100-240VAC, 50/60Hz, 1.5A
- Output: 15VDC, 2660mA

### Dimensions and Weight

- Depth: 37.8cm
- Height: 6.6cm
- Width: 19.6cm
- Weight: 1.5kg

### Environmental Specifications

- **Operating temperature:** +5 to +35 °C (41 to 95 °F), max 85% non-condensing humidity
- **Storage temperature:** 0 to 40 °C (32 to 104 °F), max 85% non-condensing humidity



Do not install this unit in locations exposed to high humidity or direct sunlight.