



VIVIDPAR3X4Q

3x 4W RGBUV Mini Par

USER MANUAL



For safety, please read this user manual carefully before initial use.

Event Lighting reserves the right to revise the manual at any time. Information and specifications within this manual are subject to change without notice. Event Lighting assumes no liability or responsibility for any errors or omissions. Please consult Event Lighting for any clarification or information regarding this item.

Version: 1

Safety Instructions

Warning

- Do not open this fixture, there is no user-serviceable parts inside. Risk of electric shock.
- Do not look directly at the light source when the fixture is on.

Caution: This unit's housing may become hot during and after operation.

- Install this fixture in a location with adequate ventilation, at least 50 cm from adjacent surfaces.
- Do not leave any flammable material within 50 cm of this unit while operating or connected to power.
- Use a safety chain when mounting this fixture overhead.
- Do not operate this device in any location where excessive dust, heat, water or humidity may affect it.
- Do not operate this fixture if the housing, lenses, or cables appear damaged.
- Do not connect this fixture to a dimmer or rheostat.
- ONLY connect this fixture to a grounded and protected circuit.
- ONLY use the hanging bracket to carry this fixture.
- In case of a serious operating problem, stop using immediately.
- The maximum ambient temperature is 40° C. Do not operate this fixture at higher temperatures.


Power Input

This fixture has an auto switching power supply that works with an input voltage range of 110-240V AC, 50/60 Hz.

Product Installation

VIVIDPAR3X4Q can be mounted in many orientations, provided each individual device is secured by the use of the correct mounting bracket. Use a safety chain when mounting PAR9X12OB overhead.

Menu

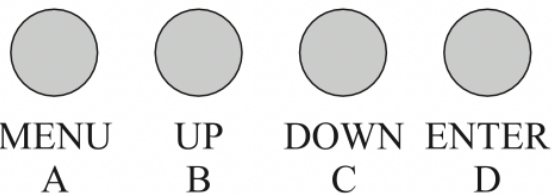

- A.MENU*
- B.UP*
- C.DOWN*
- D.ENTER*


Mode	Function	Description
DMX Function	8CH d001-d512	Select DMX channel mode and DMX start address.
Master/Slave	IP.01-IP.64	Select master/slave unit number, up to a total of 64.
Static Colours	A1.01-A1.18	Select static colour.
Auto Programs	A2.01-A2.32	Select auto program speed (slow to fast).
Fade Changing	A3.01-A3.19	Select colour combination
	A3.01-A3.32 (flashing display)	Select colour combination speed (slow to fast).
Sound-Active Mode	A4.01-A4.19	Select sound active program, 19 options.
	A4.01-A4.04 (flashing display)	Select sound sensitivity.
Strobe Mode	A5.01-A5.19	Select strobe colour combination
	A5.01-A5.32 (flashing display)	Select strobe colour speed (slow to fast)
Red	r000-r555	Red, 0-100%
Green	g000-g255	Green, 0-100%
Blue	b000-b255	Blue, 0-100%
UV	u000-u255	UV, 0-100%

DMX Chart

Ch.	Min DMX	Max DMX	Function	Description
1	0	10	No function	
	11	50	Static colour	Ch1+Ch2 colour changing
	51	100	Auto play	Ch1+Ch3 speed (slow to fast)
	101	150	Fade	Ch1+Ch2 colour changing, Ch3 speed (slow to fast)
	1511	200	Sound active	
	201	255	Strobe	Ch2 colour changing, Ch3 speed (slow to fast)
2	0	39	White	0-100%
	40	49	Red	0-100%
	50	59	Green	0-100%
	60	69	Blue	0-100%
	70	79	Amber	0-100%
	80	89	Cyan	0-100%
	90	99	Purple	0-100%
	100	109	UV	0-100%
	110	119	Amber	0-100%
	120	129	Purple	0-100%
	130	139	Rose	0-100%
	140	149	Ocean	0-100%
	150	159	Cyan	0-100%
	160	169	Blue	0-100%
170	179	Warm White	0-100%	

	180	189	Purple	0-100%
	190	199	Ocean	0-100%
	200	255	White	0-100%
3	0	255	Speed	Slow to fast
4	0	255	Master dimmer	0-100%
5	0	255	Red	0-100%
6	0	255	Green	0-100%
7	0	255	Blue	0-100%
8	0	255	UV	0-100%

IR Remote

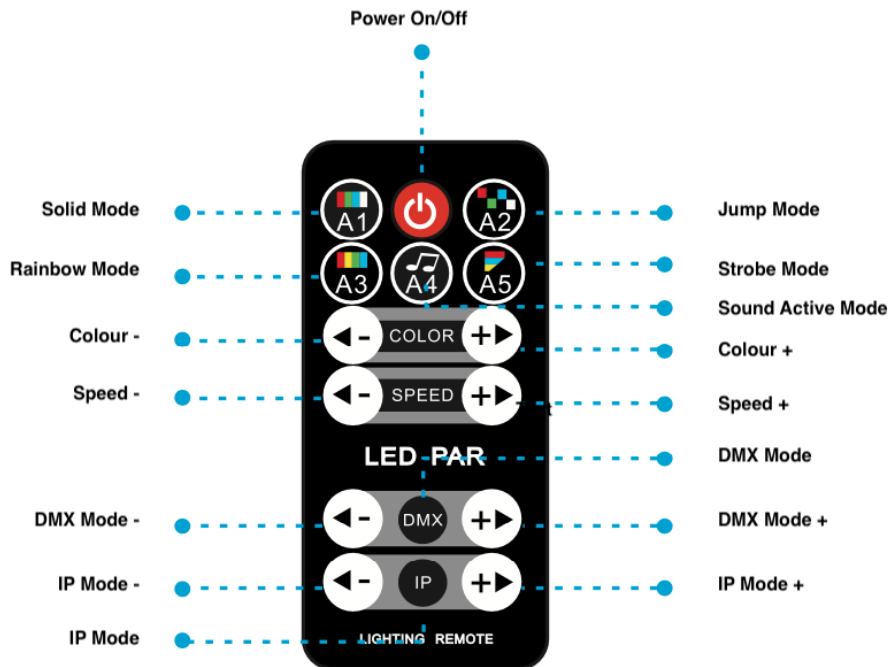

Technical Specifications

- Light source: 3 x 4W RGBW
- Operation Modes: DMX, auto, manual, sound active, master/slave, IR remote
- Control Interface: 3-pin XLR in/out, IR remote
- DMX channels: 8
- Input Voltage: 110-240V AC, 50/60 Hz
- Power consumption: 15W
- Dimensions: 128 x 128 x 128mm
- Net Weight: 0.6 kg

Warranty

Please contact your local dealer or contact Event Lighting.

www.event-lighting.com.au